

OSRAM

PHILIPS

CREE

EPISTAR

NICHIA

SEOUL

SAMSUNG



中山市镁特丽照明有限公司
MINK LED LIGHTING CO.,LTD

Phone number

+86 134 2040 8061

+853 6855 5317

Email

maggie@minkled.cn

maggieguzhen@163.com

Official website

www.minklighting.com

Address

Floor 4-5, Building 4th, NO.33, Dongxing East Road, Guzhen Town, Zhongshan City



MINK 镁特丽

EXPLORE THE BEAUTY OF NATURE.

探索自然之美



2025-2026
Outdoor Waterproof Lighting

公司简介/Company Profile



中山市镁特丽照明有限公司是一家专注于户外照明产品设计和生产的综合性公司。中山市镁特丽光电有限公司成立于2011年,我们有一百多名工人,厂房面积6000m²,我们的产品销往欧洲、南美、东南亚、中东等。“MK,你的防水专家”是我们的使命,用最好的建筑照明解决方案和视觉舒适度创造情感。我们坚持创新务实的发展理念,超越自己,并追求卓越。我们一直专注于产品开发,始终以客户为中心,依靠不断提升的创新能力,整合灵活的单品定制能力,日益完善的配送能力和不断完善的售后服务成为深受客户信赖的品牌,公司以强大的开发能力为基础,致力于为园林、庭院氛围照明打造全系列照明产品。目前,公司主要产品有五大系列:地插灯、地埋灯、户外壁灯、墙角灯、庭院灯。中山市镁特丽照明有限公司不断加快创新设计和研发的步伐,为客户提供优质、极致的服务是公司的发展准则,将低碳、环保、节能贯彻到底结合市场需求为客户创造更大的价值。

Zhongshan MINK LED LIGHTING CO.,LTD. is a comprehensive company focusing on the design and production of outdoor lighting products. Zhongshan MINK LED Lighting Co., Ltd. was established in 2011. We have more than 100 workers and 6000 square meters factory. We sold to Europe, South America, southeast Asia, middle east and so on."MK, your waterproof expert" is our mission to create emotions with the best architectural lighting solutions and visual comfort. We adhere to the innovative and pragmatic development concept, surpass ourselves, and pursue excellence. We have always focused on product development, always customer-centric, relying on the continuous improvement of innovation capabilities, integrating flexible single product customization capabilities, increasingly improved distribution capabilities and continuously improved after-sales service to become a brand trusted by customers. The company is based on strong development capabilities and is committed to creating a full range of lighting products for garden and courtyard atmosphere lighting. At present, the company's main products include five series: ground plug lamps, underground lamps, outdoor wall lamps, corner lamps, and garden lamps. Zhongshan MINK LED LIGHTING CO.,LTD. continues to accelerate the pace of innovative design and research and development. Providing customers with high-quality and extreme services is the company's development principle. It will implement low-carbon, environmental protection, and energy saving to the end and combine market demand to create greater value for customers.

公司展厅/Company Showroom



公司展厅 / Company Showroom



防水测试仪器
Simulate Waterproof Tester



雷击浪涌测试仪
Lightning Surge Generator




多路温度测试仪
Multiplex Temperature meter



光光电综合测试系统
Spectroscopic analysis system




ZC93-3型绝缘电阻表
ZC93-3 Type insulation resistance meter



老化测试
Aging test



装配线
Production Line



包装过程
Packaging process



CERTIFICATE (HAVE CE,GS,ROHS AND ERP6000 HOURS)



2025-2026 Product Catalog

产品目录

A

LED SPIKE LIGHT

LED 地插灯

01~28

B

LED UNDERGROUND LIGHT

LED 地埋灯


29~52

C

LED CORNER STEP LIGHT

LED 墙角灯

53~85

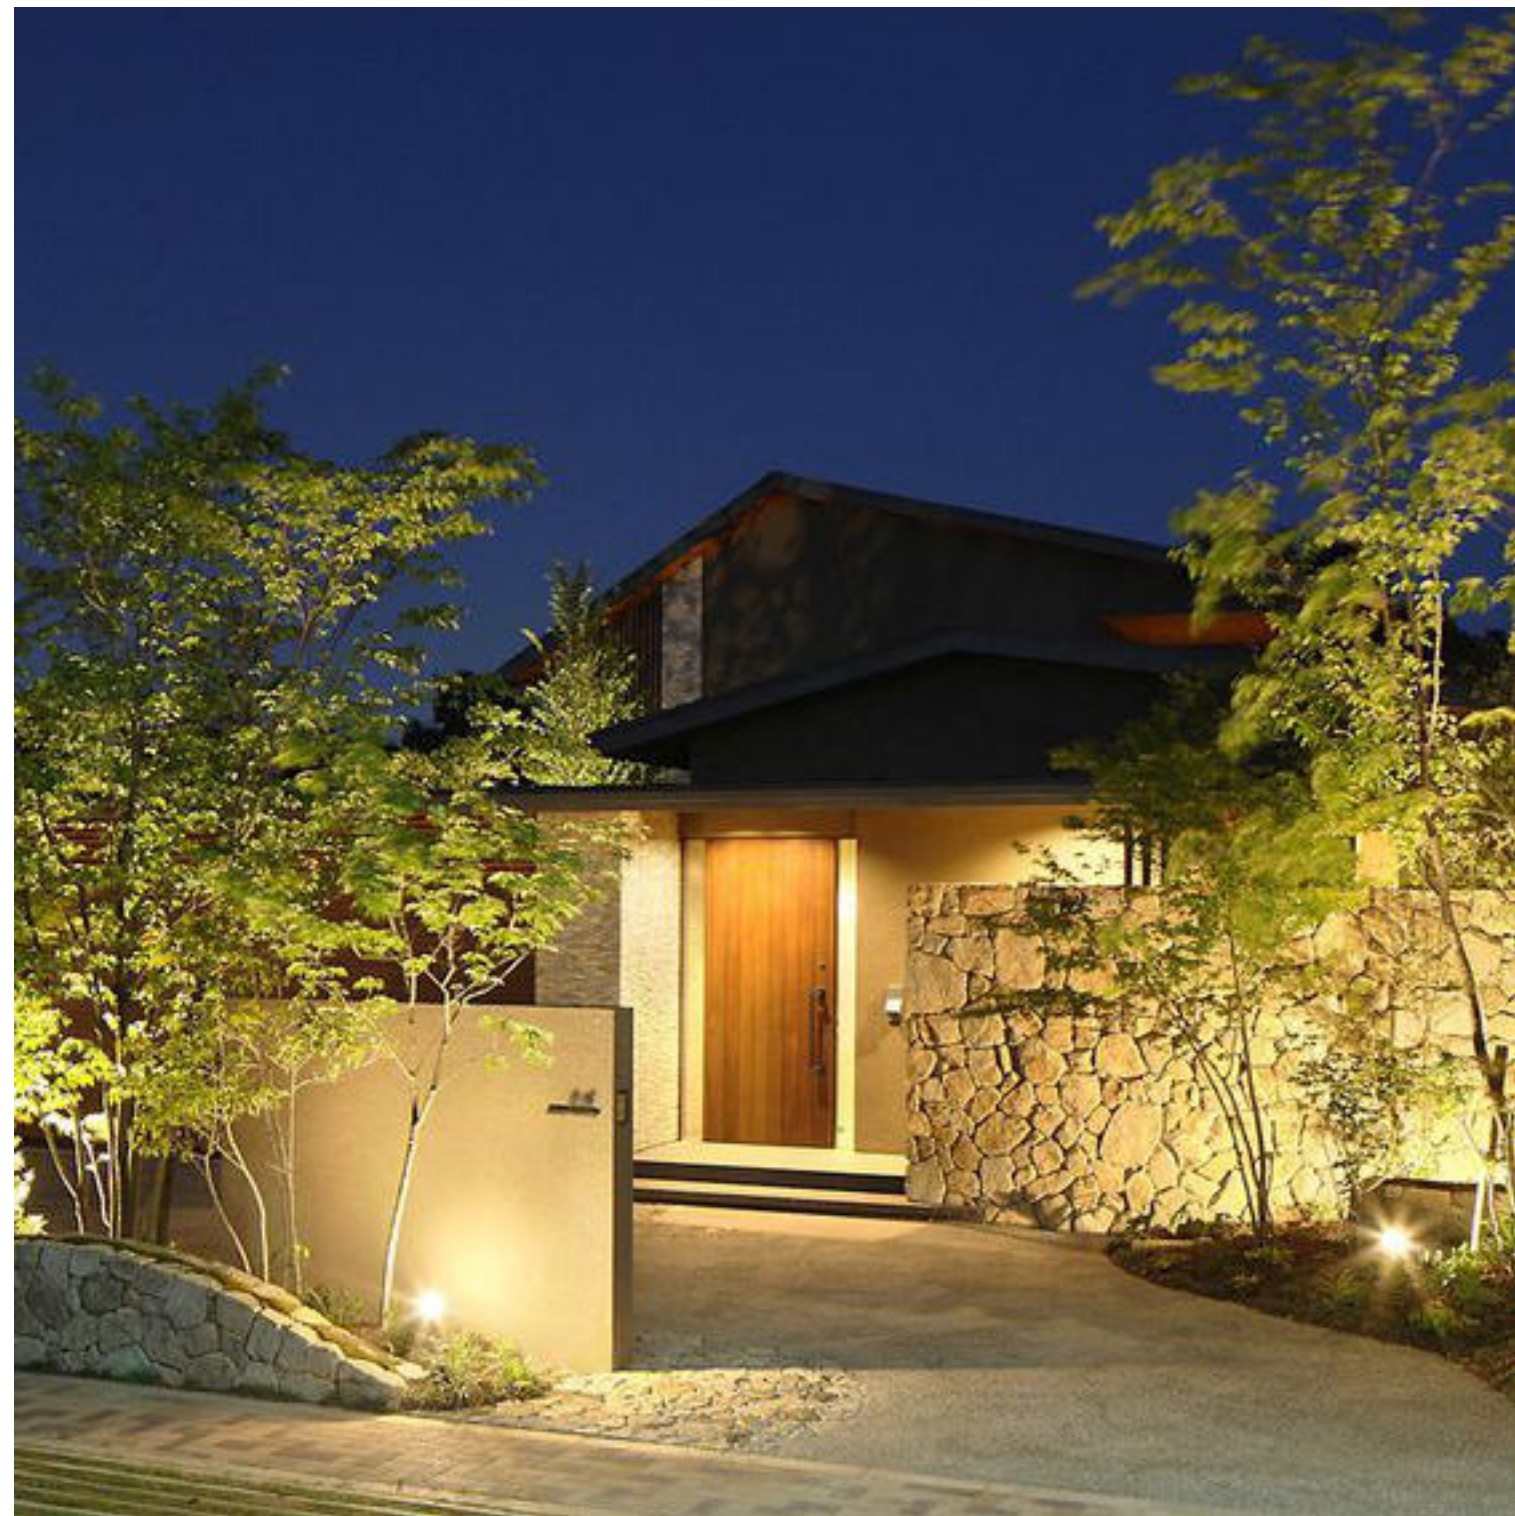

LED Spike light

Products working temperature is -30°C-65°C, so they can adjust to various ranges of temperature and humidity. Those spike lights use high-quality aluminum as material,with solid & reliable structure,high IP rating,dust-proof design,which are most suitable to use for outdoor garden,paver,square,parks,public entertainment places as decoration or lighting purpose.



MK-C9902

IP65



Specification

Power:	7W 12W
Size:	Ø50xH240mm Ø60xH256mm
Material:	Die Casting Aluminum
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+
Angle:	60°


Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Set 1:Connect to AC85-265V





Set 2:Connect to driver
Connect to DC 12V





MK-C9901

IP65

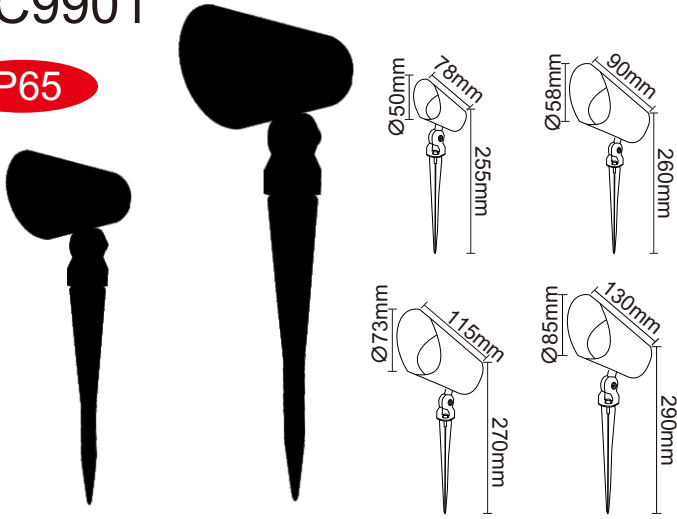

MK-C6603

IP65

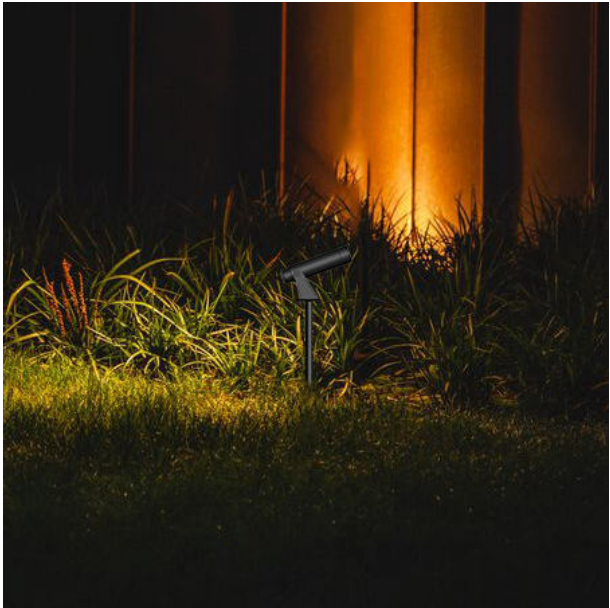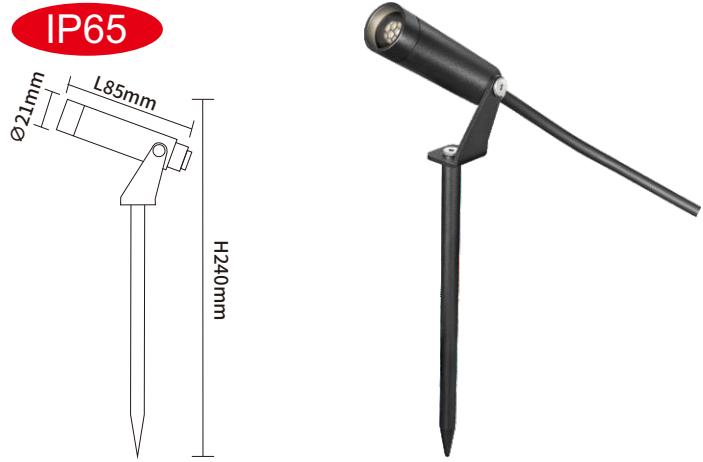

Specification

Power:	3W 5W 7W 12W 15W 24W
Size:	Ø50xL78xH255mm Ø58xL90xH260mm Ø73xL115xH270mm Ø85xL130xH290mm
Material:	Die Casting Aluminum
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+
Angle:	24°


Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Set 1:Connect to AC85-265V



Set 2:Connect to driver
Connect to DC 12V




Specification


Power:	3W
Size:	Ø21xL85xH240mm
Material:	Aluminum
IP Rating:	IP65
Input:	DC12V/24V
Warranty:	2 Years
PF:	≥0.5
CRI:	80+

Installation:

Set 1:Connect to transformer




Set 2:Transformer
Connect to AC 220V




MK-W6604

Power:2W
Size:60x50x120
Material:Aluminum
IP Rating:IP65
Input:AC85-265V

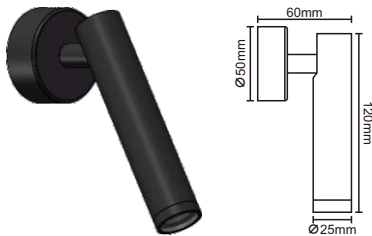

MK-C6605

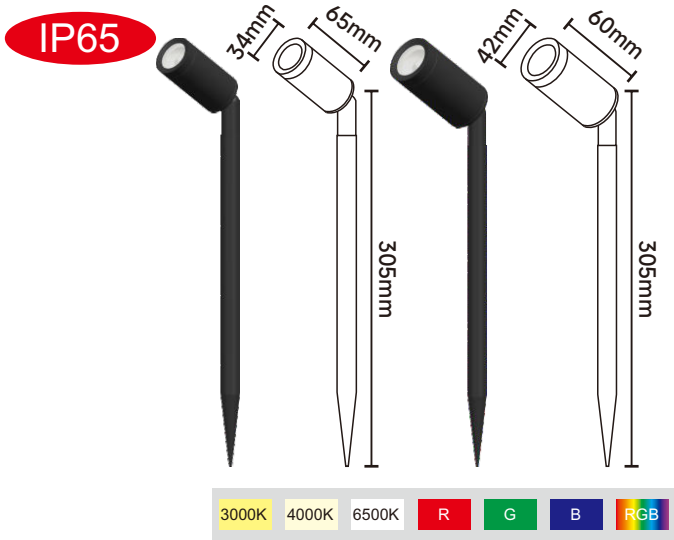

Specification

Power:	3W 5W
Size:	67x93x288mm
Material:	Aluminum
IP Rating:	IP65
Input:	DC24V
Warranty:	2 Years
PF:	≥0.5
CRI:	80+


Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:


3W:Connect to DC 12V



5W:Connect to DC 12V



MK-5806 7W / MK-5807 5W

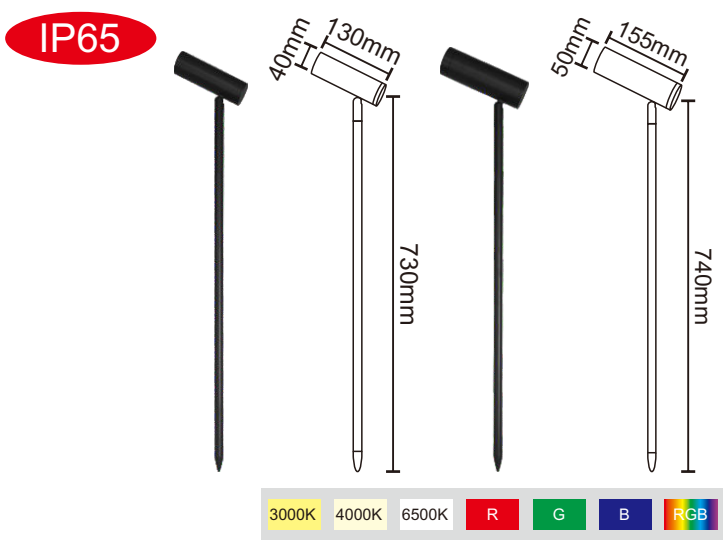

Specification

Power:	7W 5W
Size:	155x50x740mm 130x40x730mm
Material:	Aluminum
IP Rating:	IP65
Input:	DC24V
Warranty:	2 Years
PF:	≥0.5
CRI:	80+


Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

7W:Connect to DC 12V



5W:Connect to DC 12V



MK-C6602



Specification

Power:	5W
Size:	Ø45xL70xH250mm
Material:	Plastic+Alu
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
PF:	≥0.5
CRI:	80+


Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:


Set 1:Connect to AC85-265V



Set 2:Connect to driver
Connect to DC 12V



MK-2815 7W

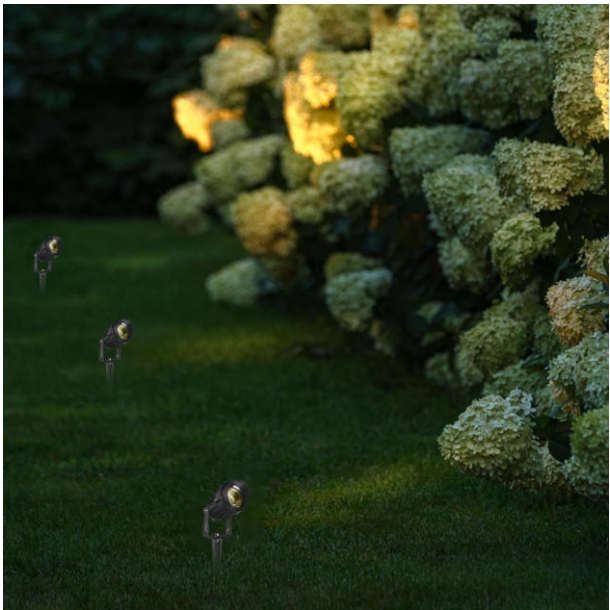

Specification

Power:	7W
Size:	Ø70xH250mm
Material:	Die Casting Aluminum+PMMA+GLASS
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+
Angle:	30°


Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:


Set 1:Connect to AC85-265V



Set 2:Connect to driver
Connect to DC 12V



MK-2815 12W 15W

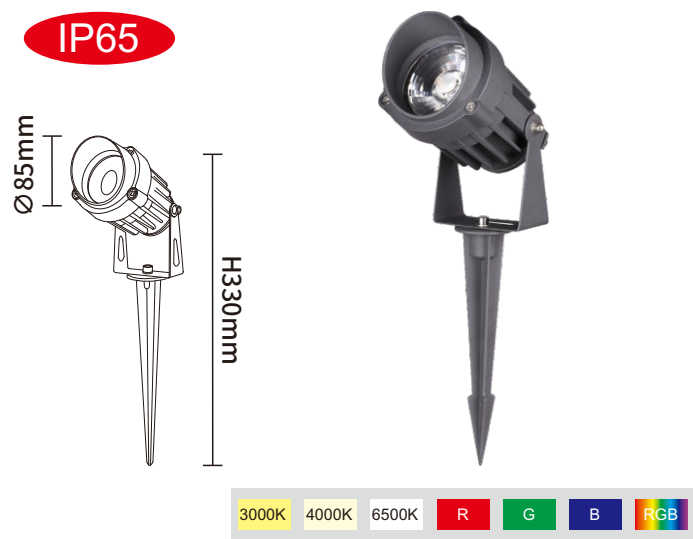

Specification

Power:	12W 15W
Size:	Ø85xH330mm
Material:	Die Casting Aluminum+PMMA+GLASS
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+
Angle:	30°


Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:


Set 1:Connect to AC85-265V



Set 2:Connect to driver
Connect to DC 12V



MK-2815 24W

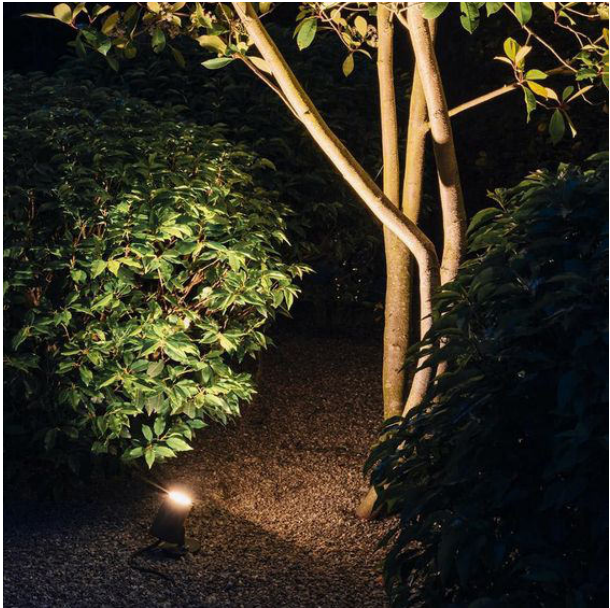

Specification

Power:	24W
Size:	Ø114xH400mm
Material:	Die Casting Aluminum+PMMA+GLASS
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+
Angle:	30°


Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Set 1:Connect to AC85-265V




Set 2:Connect to driver
Connect to DC 12V



MK-2810 15W

IP65



Specification

Power:	15W
Size:	L80xW80xH295mm
Material:	Die Casting Aluminum
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+


Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Set 1:Connect to AC85-265V




Set 2:Connect to driver
Connect to DC 12V



MK-2802 7W 12W 15W

IP65



Specification

Power:	7W 12W 15W
Size:	Ø70xH285mm Ø80xH300mm
Material:	Die Casting Aluminum
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+
Angle:	30°


Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:


Set 1:Connect to AC85-265V



Set 2:Connect to driver
Connect to DC 12V



MK-2009 15W

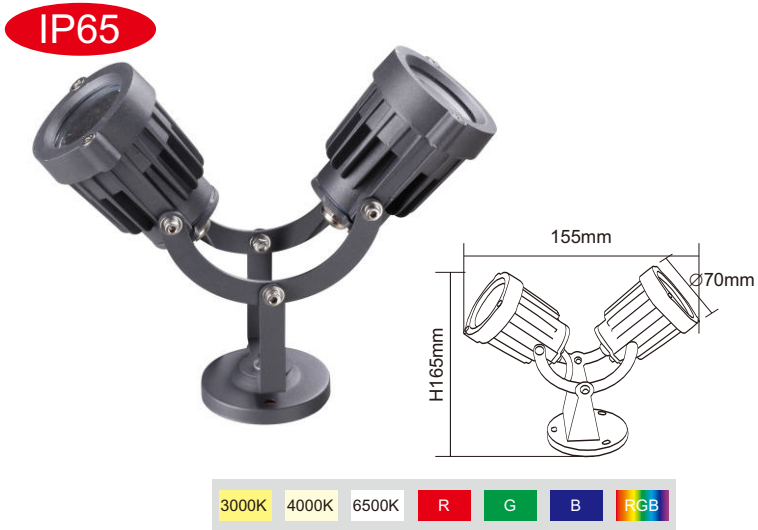

Specification

Power:	15W
Size:	L155xW70xH165mm
Material:	Die Casting Aluminum+PMMA+Glass
IP Rating:	IP65
Input:	AC100-240V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+


Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Set 1:Connect to AC85-265V



Set 2:Connect to driver
Connect to DC 12V



MK-C48001



Specification

Power:	10W
Size:	Ø70xH340mm
Material:	Aluminum
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+


Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Set 1:Connect to AC85-265V



Set 2:Connect to driver
Connect to DC 12V



MK-C0205P

IP65



Specification

Power:	5W
Size:	Ø69xH250mm
Material:	Plastic+Alu
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
PF:	≥0.5
CRI:	80+


Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Set 1:Connect to AC85-265V




Set 2:Connect to driver
Connect to DC 12V



MK-C2010P

IP65

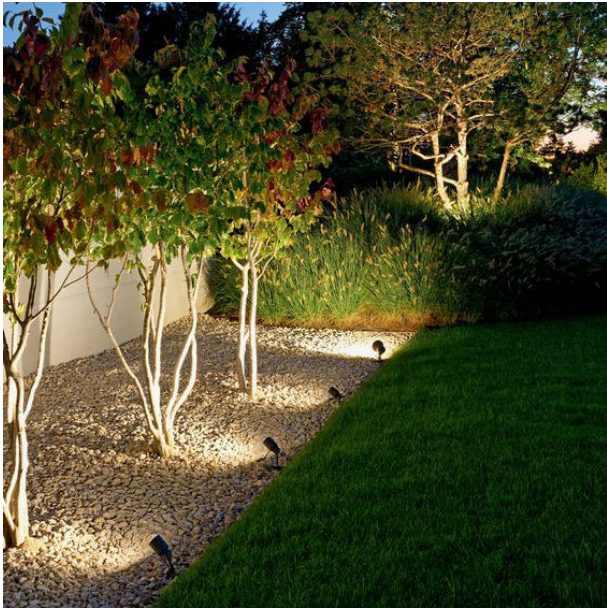

Specification

Power:	10W
Size:	Ø80xH320mm
Material:	Plastic+Alu
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
PF:	≥0.5
CRI:	80+


Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Set 1:Connect to AC85-265V



Set 2:Connect to driver
Connect to DC 12V



MK-C0103 Lens



Specification

Power:	3W 5W
Size:	Ø40xH250mm
Material:	Die Casting Aluminum
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+


Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Set 1:Connect to AC85-265V



Set 2:Connect to driver
Connect to DC 12V



MK-C0205



Specification

Power:	5W
Size:	Ø65xH250mm
Material:	Die Casting Aluminum
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+


Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Set 1:Connect to AC85-265V



Set 2:Connect to driver
Connect to DC 12V



MK-C0206A



Specification

Power:	7W
Size:	Ø75xH270mm
Material:	Die Casting Aluminum
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+


Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Set 1:Connect to AC85-265V



Set 2:Connect to driver
Connect to DC 12V



MK-C0212 CAP



Specification

Power:	12W
Size:	Ø95xH280mm
Material:	Die Casting Aluminum
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+


Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Set 1:Connect to AC85-265V



Set 2:Connect to driver
Connect to DC 12V



MK-C0209



Specification

Power:	7W
Size:	Ø60xL83xH280mm
Material:	Aluminum
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+


Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Set 1:Connect to AC85-265V



Set 2:Connect to driver
Connect to DC 12V



MK-C0210



Specification

Power:	10W
Size:	Ø60xL93xH285mm
Material:	Aluminum
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+


Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Set 1:Connect to AC85-265V




Set 2:Connect to driver
Connect to DC 12V



MK-C0103 一束光

IP65



3000K 4000K 6500K R G B RGB



Specification

Power:	3W
Size:	Ø42xL80xH265mm
Material:	Aluminum
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years


Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Set 1:Connect to AC85-265V




Set 2:Connect to driver
Connect to DC 12V



MK-C0710 一束光

IP65



3000K 4000K 6500K R G B RGB



Specification

Power:	10W CREE
Size:	Ø65xH180mm
Material:	Aluminum+Acrylic
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+


Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Set 1:Connect to AC85-265V



Set 2:Connect to driver
Connect to DC 12V



MK-C54004

IP65



Specification

Power:	20W
Size:	Ø90x190mm
Material:	Aluminum
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+


Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Set 1:Connect to AC85-265V



Set 2:Connect to driver
Connect to DC 12V



MK-C54005

IP65



Specification

Power:	15W
Size:	Ø85x150mm
Material:	Aluminum
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+


Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Set 1:Connect to AC85-265V




Set 2:Connect to driver
Connect to DC 12V



MK-C7301A-CAP IP67



MK-C7301A-CAP IP67

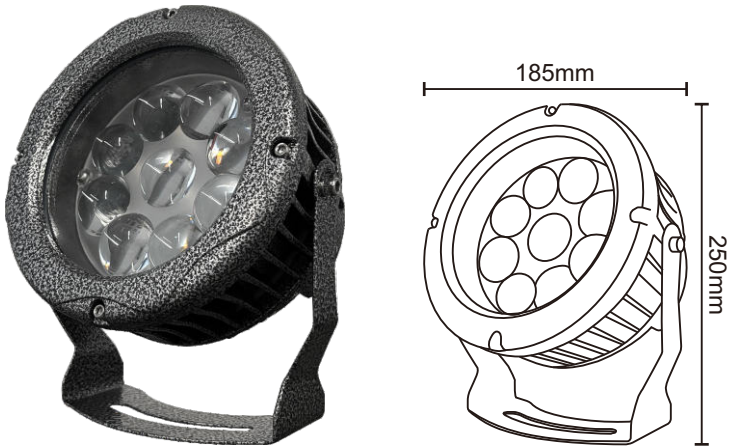

Specification

Power:	24W
Size:	140x180x230mm
Material:	Aluminum
IP Rating:	IP67
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.



Installation:

Set 1: Connect to AC85-265V



Specification

Power:	30W
Size:	185x110x250mm
Material:	Aluminum
IP Rating:	IP67
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Lamp body is UV resistant;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.



Installation:

Set 1: Connect to AC85-265V



MK-C54002

IP65



Specification

Power:	7W CREE
Size:	70x70xH180mm
Material:	Aluminum
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+

Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.



MK-DT0208 GU10

IP65



Specification

Power:	GU10
Size:	Ø100xH300mm
Material:	Aluminum / Plastic
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years


Features

- Lamp body is UV resistant;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Set 1:Connect to AC85-265V




Set 2:Connect to driver
Connect to DC 12V




Installation:

Set 1:Connect to AC85-265V



Set 2:Connect to driver
Connect to DC 12V



MK-C3904-GU10

IP65





Specification

Power:	GU10
Size:	Ø80x95x290mm
Material:	Aluminum / Plastic
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years


Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Set 1: Connect to AC85-265V



MK-C6608-GU10

IP65

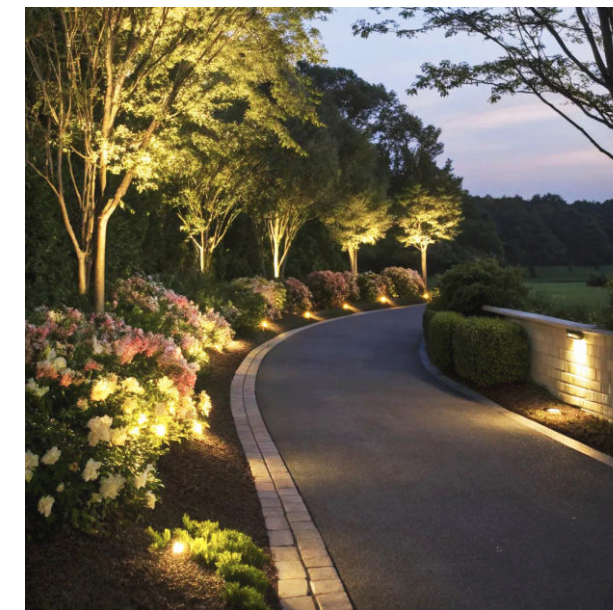


Specification

Power:	GU10
Size:	Ø60x90x290mm
Material:	Aluminum
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years


Features

- Lamp body is UV resistant;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.



Installation:

Set 1:Connect to AC85-265V



MK-C0609-GU10



MK- 无型号



Specification

Power:	GU10
Size:	Ø65x100x230mm
Material:	Aluminum / Plastic
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years



Features

- Adopt COB LED technology;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.



Installation:

Set 1:Connect to AC85-265V



Specification

Power:	GU10
Size:	Ø60x90x290mm
Material:	Aluminum
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years


Features

- Lamp body is UV resistant;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Set 1:Connect to AC85-265V



MK-C0210P GU10

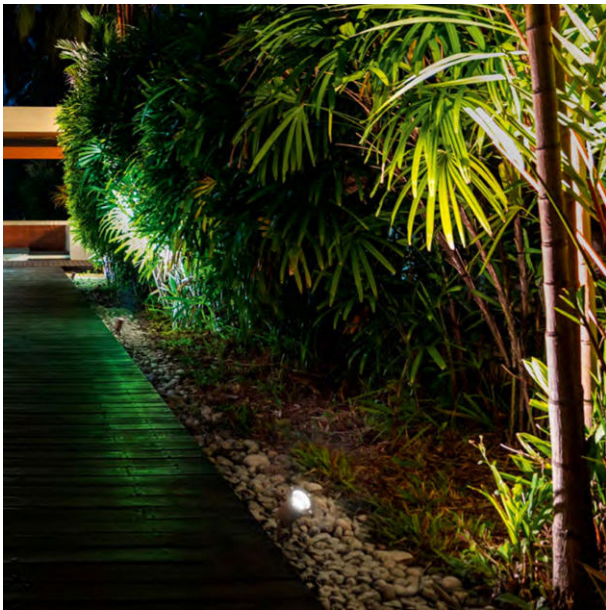

Specification

Power:	GU10
Size:	Ø80xH320mm
Material:	Plastic+Alu
IP Rating:	IP65
Input:	AC85-265V 50/60Hz


Features

- Lamp body is UV resistant;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Set 1:Connect to AC85-265V



Set 2:Connect to driver
Connect to DC 12V



MK-C0305 GU10



Specification

Power:	GU10
Size:	Ø110xH370mm
Material:	Aluminum
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years


Features

- Lamp body is UV resistant;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:


Set 1:Connect to AC85-265V




Set 2:Connect to driver
Connect to DC 12V



MK-C48002 GU10

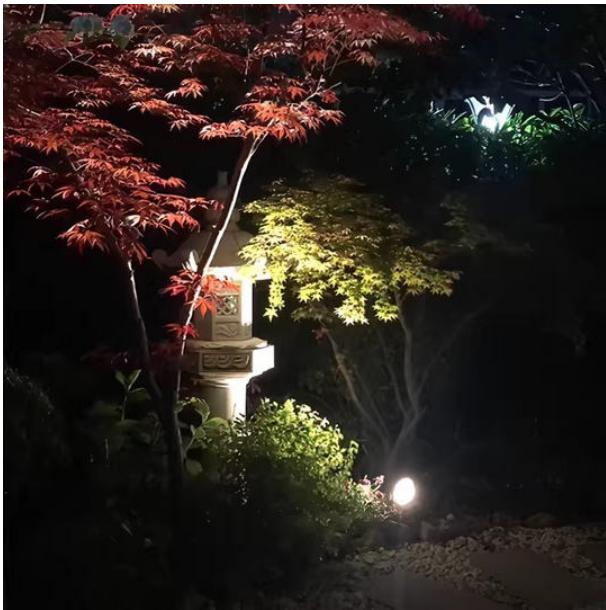

MK-C111P GU10

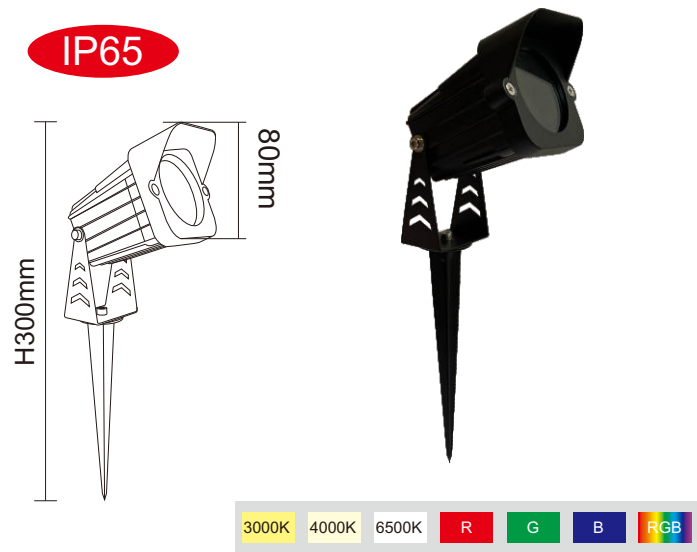

Specification

Power:	GU10
Size:	Ø60xH300mm
Material:	Aluminum
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years


Features

- Lamp body is UV resistant;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Set 1:Connect to AC85-265V



Set 2:Connect to driver
Connect to DC 12V



Specification

Power:	GU10
Size:	Ø80xH300mm
Material:	Aluminum
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years


Features

- Lamp body is UV resistant;
- Hardware integrated design;
- Special design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Set 1:Connect to AC85-265V



Set 2:Connect to driver
Connect to DC 12V



LED Underground Light

Products working temperature is -30°C-65°C, so they can adjust to various ranges of temperature and humidity. Those spike lights use high-quality aluminum as material,with solid & reliable structure,high IP rating,dust-proof design,which are most suitable to use for outdoor garden,paver,square,parks,public entertainment places as decoration or lighting purpose.



MK120F-GU10 MK120-GU10



Specification	
Power:	GU10
Size:	L120xW120xH120mm Ø120xH120mm
Material:	Aluminum + stainless steel
IP Rating:	IP67
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+


Features

- Corrosion resistant structure;
- IP rating up to 67;
- Lifespan over 30000hours.




Installation:

Connect to AC85-265V




Connect to AC85-265V



MK-2201(With screw type)

IP67

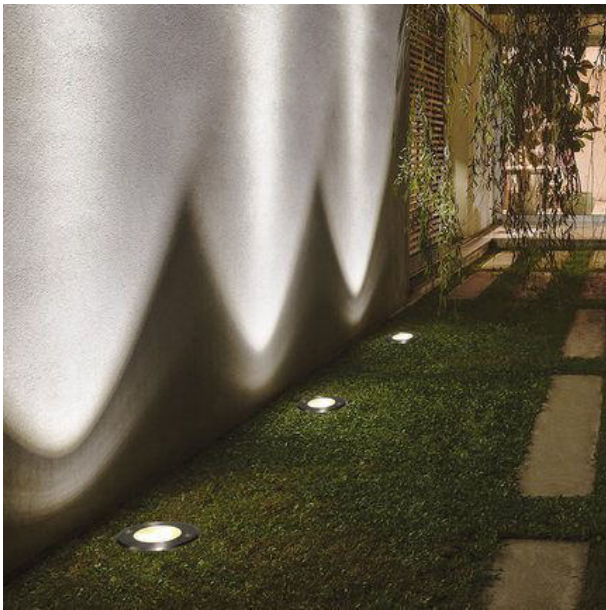


Specification

Power:	COB
Size:	Ø65x75mm Ø80x75mm Ø100x87mm Ø120x90mm Ø150x90mm
Material:	Aluminum + stainless steel
IP Rating:	IP67
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+
Angle:	24°


Features

- Use COB LED, high lumen output;
- Low power consumption & heat radiation;
- Elegant design with solid & Corrosion resistant structure;
- IP rating up to 67;
- Lifespan > 30000hours.




Installation:

Connect to AC85-265V



MK-2202(Without screw type)

IP67

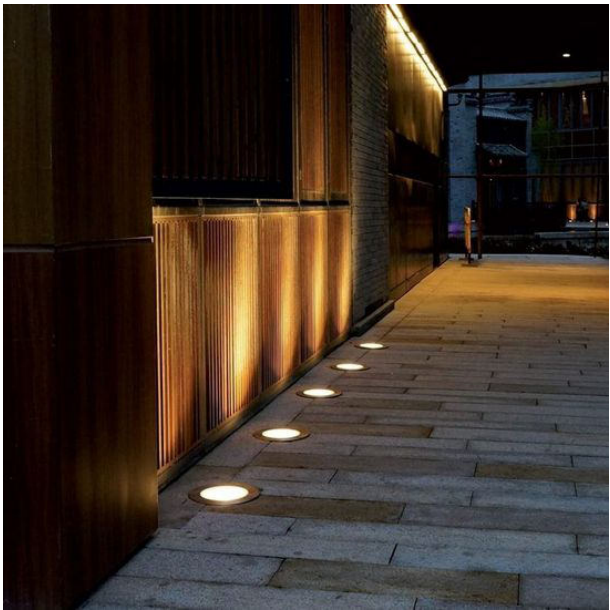


Specification

Power:	COB
Size:	Ø65x75mm Ø80x75mm Ø100x87mm Ø120x90mm Ø150x90mm
Material:	Aluminum + stainless steel
IP Rating:	IP67
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+
Angle:	24°


Features

- Use COB LED, high lumen output;
- Low power consumption & heat radiation;
- Elegant design with solid & Corrosion resistant structure;
- IP rating up to 67;
- Lifespan > 30000hours.



Installation:

Connect to AC85-265V



MK-2203

IP67



Specification

Power:	COB
Size:	Ø65x75mm Ø80x75mm Ø100x87mm Ø120x90mm Ø150x90mm
Material:	Aluminum + stainless steel
IP Rating:	IP67
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+
Angle:	24°



Features

- Use COB LED, high lumen output;
- Low power consumption & heat radiation;
- Elegant design with solid & Corrosion resistant structure;
- IP rating up to 67;
- Lifespan > 30000hours.



Installation:

Connect to AC85-265V



MK-2204(With mesh lens)

IP67



Specification

Power:	COB
Size:	Ø65x75mm Ø80x75mm Ø100x87mm Ø120x90mm Ø150x90mm
Material:	Aluminum + stainless steel
IP Rating:	IP67
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+
Angle:	24°



Features

- Use COB LED, high lumen output;
- Low power consumption & heat radiation;
- Elegant design with solid & Corrosion resistant structure;
- IP rating up to 67;
- Lifespan > 30000hours.



Installation:

Connect to AC85-265V



MK-2205

IP67



Specification

Power:	3W 5W 7W 12W 15W
Size:	Ø65x75mm Ø80x75mm Ø100x85mm Ø120x90mm Ø150x90mm
Material:	Die-casting Aluminum+Stainless steel+Reflector cup+Lens+Net
IP Rating:	IP67
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+


Features

- Use COB LED, high lumen output;
- Low power consumption & heat radiation;
- Elegant design with solid & Corrosion resistant structure;
- IP rating up to 67;
- Lifespan > 30000hours.



Installation:

Connect to AC85-265V



MK-DM0404

IP67



Specification

Power:	COB
Size:	Ø65mm Ø80mm Ø100mm Ø120mm Ø150mm Ø160mm Ø180mm Ø300mm
Material:	Die-casting Aluminum + Stainless steel
IP Rating:	IP67
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Use COB LED, high lumen output;
- Low power consumption & heat radiation;
- Elegant design with solid & Corrosion resistant structure;
- IP rating up to 67;
- Lifespan > 30000hours.




Installation:

Connect to AC85-265V



MK-DM0405

IP67

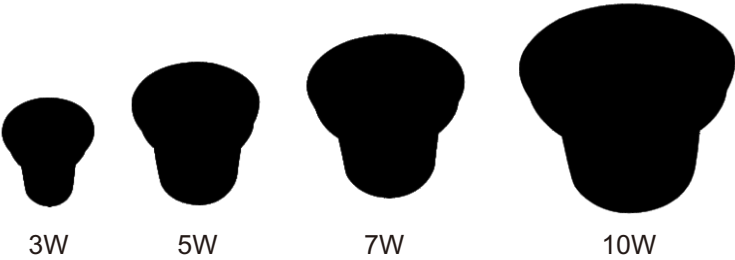

Specification

Power:	COB
Size:	Ø65mm Ø80mm Ø100mm Ø120mm
Material:	Die-casting Aluminum + Stainless steel
IP Rating:	IP67
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Use COB LED, high lumen output;
- Low power consumption & heat radiation;
- Elegant design with solid & Corrosion resistant structure;
- IP rating up to 67;
- Lifespan > 30000hours.




Installation:

Connect to AC85-265V



MK-2207

IP67



Specification

Power:	1W 3W 6W 9W
Size:	Ø42xH72.5mm Ø52xH82.5mm Ø62xH88.5mm Ø75xH95mm
Material:	Stainless steel
IP Rating:	IP67
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Use COB LED, high lumen output;
- Low power consumption & heat radiation;
- Elegant design with solid & Corrosion resistant structure;
- IP rating up to 67;
- Lifespan > 30000hours.




Installation:

Connect to AC85-265V

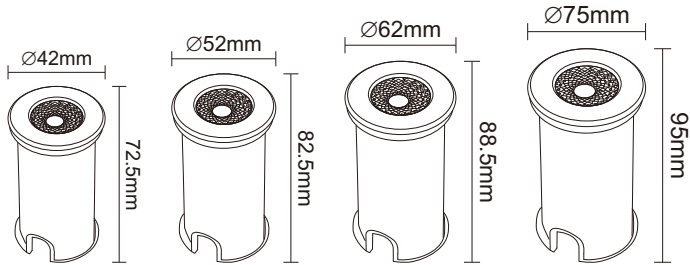

MK-DM01

IP67



Specification

Power:	1W 3W
Size:	Ø42x82mm Ø52x82mm Ø62x82mm
Material:	Stainless steel
IP Rating:	IP67
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Use COB LED, high lumen output;
- Low power consumption & heat radiation;
- Elegant design with solid & Corrosion resistant structure;
- IP rating up to 67;
- Lifespan > 30000hours.



Installation:

Connect to AC85-265V

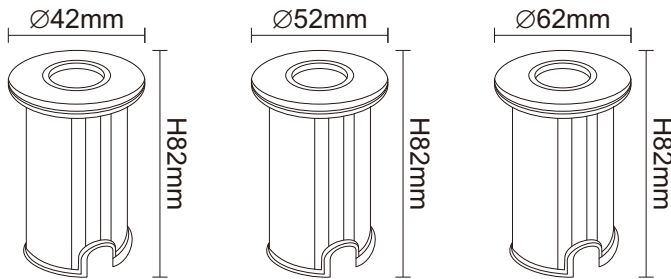

MK-DM0403(With screw type)

IP67



3W 6W 9W 12W



Specification

Power:	1W 3W 5W 6W 7W 9W 12W 15W 18W 24W 36W
Size:	Ø65mm Ø80mm Ø100mm Ø120mm Ø150mm Ø160mm Ø180mm Ø200mm Ø220mm Ø250mm Ø300mm
Material:	Die-casting Aluminum + Stainless steel
IP Rating:	IP67
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Use SMD LED, high lumen output;
- Low power consumption & heat radiation;
- Elegant design with solid & Corrosion resistant structure;
- IP rating up to 67;
- Lifespan > 30000hours.



Installation:

Connect to AC85-265V



MK-DM0408

IP65



1 Side

2 Sides



Specification

Power:	2W / 3W / 4W 2x2W 2x3W 2x4W
Size:	Ø100x40mm Ø120x40mm Ø150x40mm
Material:	Die-casting Aluminum
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Use COB LED, high lumen output;
- Low power consumption & heat radiation;
- Elegant design with solid & Corrosion resistant structure;
- IP rating up to 65;
- Lifespan > 30000hours.




Installation:

Connect to AC85-265V



MK-DM0406

IP67

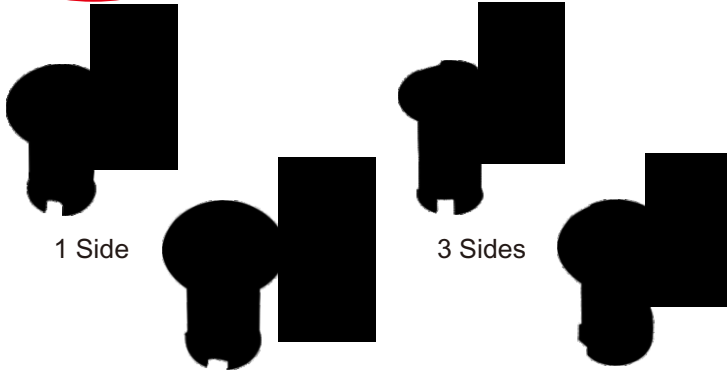


1 Side

2 Sides

3 Sides

4 Sides



Specification

Power:	1W 3W
Size:	Ø42mm Ø52mm Ø62mm
Material:	Die-casting Aluminum
IP Rating:	IP67
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Use COB LED, high lumen output;
- Low power consumption & heat radiation;
- Elegant design with solid & Corrosion resistant structure;
- IP rating up to 67;
- Lifespan > 30000hours.



Installation:

Connect to AC85-265V



MK-DM0405

IP67



3000K 4000K 6500K



Specification

Power:	3W 5W 7W 12W 18W
Size:	Ø68mm Ø80mm Ø100mm Ø120mm Ø150mm Ø180mm Ø200mm
Material:	Die-casting Aluminum
IP Rating:	IP67
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Use COB LED, high lumen output;
- Low power consumption & heat radiation;
- Elegant design with solid & Corrosion resistant structure;
- IP rating up to 67;
- Lifespan > 30000hours.



Installation:

Connect to AC85-265V




MK-DM39022

IP67



3000K 4000K 6500K

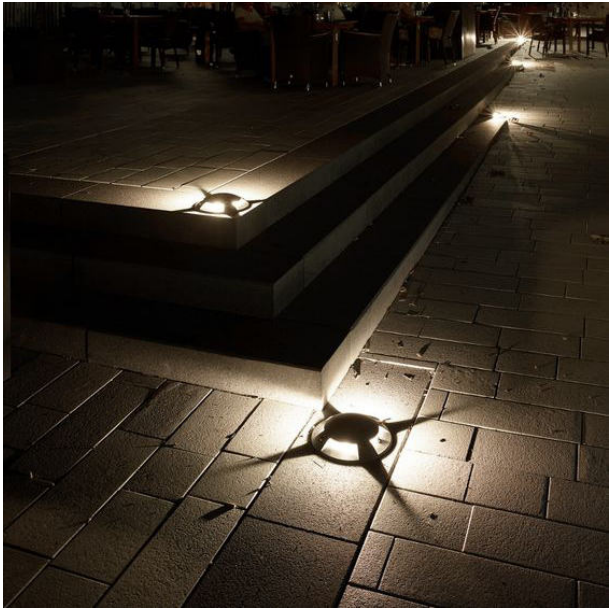

Specification

Power:	GU10
Size:	Ø110xH145mm
Material:	Aluminum+Stainless steel
IP Rating:	IP67
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Use COB LED, high lumen output;
- Low power consumption & heat radiation;
- Elegant design with solid & Corrosion resistant structure;
- IP rating up to 67;
- Lifespan > 30000hours.



Installation:

Connect to AC85-265V

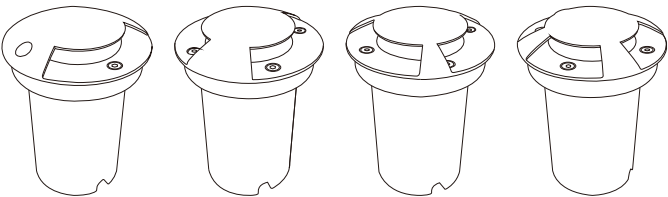

MK-0410

IP67



Specification

Power:	3W 5W 9W 15W 18W 30W
Size:	Ø65mm Ø80mm Ø100mm Ø120mm Ø150mm Ø160mm Ø180mm Ø200mm
Material:	Aluminum+Stainless steel
IP Rating:	IP67
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Use COB LED, high lumen output;
- Low power consumption & heat radiation;
- Elegant design with solid & Corrosion resistant structure;
- IP rating up to 67;
- Lifespan > 30000hours.



Installation:

Connect to AC85-265V



MK-DM10002

IP67



Specification

Power:	10W 11W 14W
Size:	Ø100x80mm Ø150x90mm Ø150x185mm
Material:	Aluminum+Stainless steel
IP Rating:	IP67
Input:	AC220V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Use COB LED, high lumen output;
- Low power consumption & heat radiation;
- Elegant design with solid & Corrosion resistant structure;
- IP rating up to 67;
- Lifespan > 30000hours.




Installation:

Connect to AC85-265V

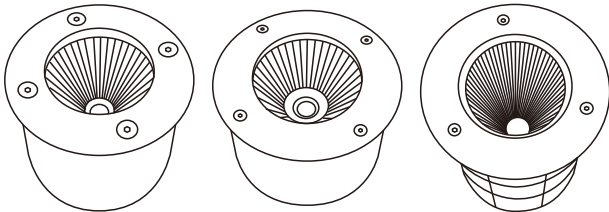

MK- IP68 无型号

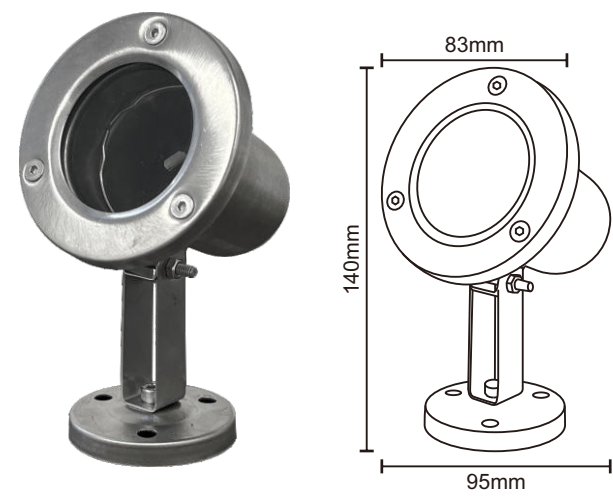

Specification

Power:	MR16
Size:	Ø83x95x140mm
Material:	Stainless steel
IP Rating:	IP68
Input:	AC85-265V
Warranty:	2 Years
PF:	≥0.5
CRI:	MR16 Light Source



Features

- Use SMD LED, high lumen output;
- Low power consumption & heat radiation;
- Elegant design with solid & Corrosion resistant structure;
- IP rating up to 68;
- Lifespan > 30000hours.




Installation:

Connect to driver
Connect to DC12/24V



MK- 无型号 IP68

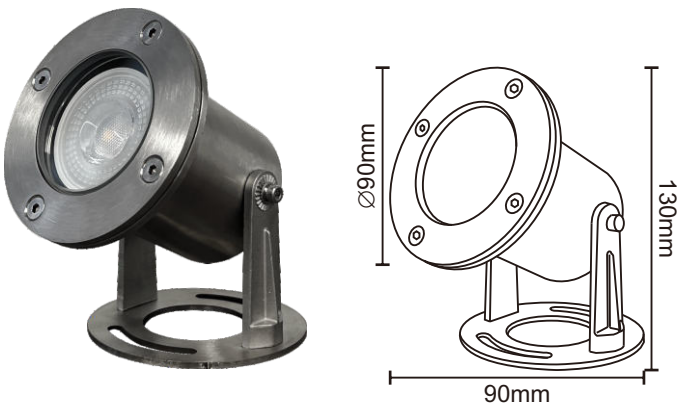

Specification

Power:	GU10
Size:	Ø90x90x130mm
Material:	Stainless steel
IP Rating:	IP68
Input:	AC85-265V
Warranty:	2 Years
PF:	≥0.5
CRI:	GU10 Light Source



Features

- Use SMD LED, high lumen output;
- Low power consumption & heat radiation;
- Elegant design with solid & Corrosion resistant structure;
- IP rating up to 68;
- Lifespan > 30000hours.




Installation:

Connect to driver
Connect to DC12/24V



MK-BL190

IP68

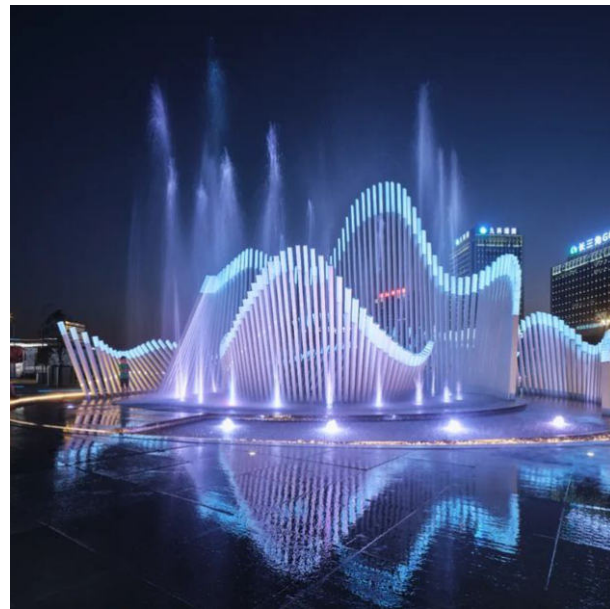


Specification

Power:	3W 6W 9W 12W 18W 24W 36W
Size:	Ø82mm Ø120mm Ø145mm Ø160mm Ø175mm Ø190mm Ø210mm
Material:	Stainless steel
IP Rating:	IP68
Input:	DC12/24V
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Use SMD LED, high lumen output;
- Low power consumption & heat radiation;
- Elegant design with solid & Corrosion resistant structure;
- IP rating up to 68;
- Lifespan > 30000hours.





Installation:

Connect to driver
Connect to DC12/24V



MK-YC Series

IP68

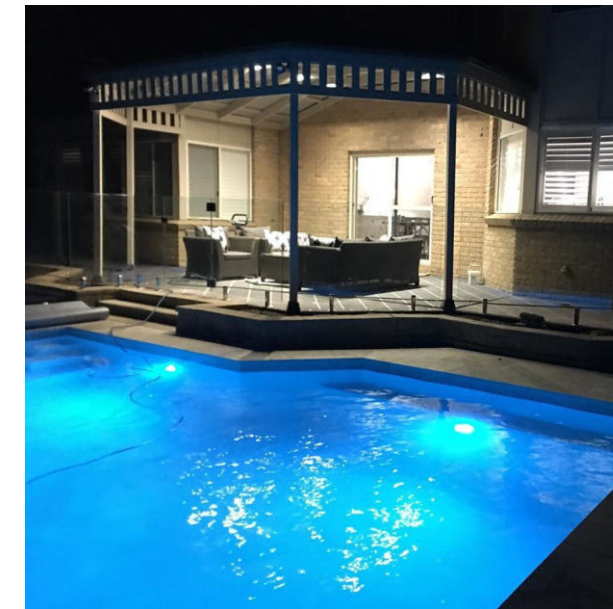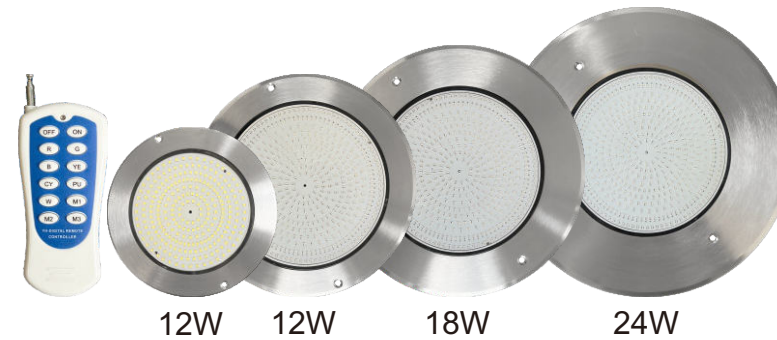

Specification

Power:	12W 18W 24W
Size:	Ø175mm Ø230mm Ø260mm Ø300mm
Material:	Stainless steel
IP Rating:	IP68
Input:	DC12/24V
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Use SMD LED, high lumen output;
- Low power consumption & heat radiation;
- Elegant design with solid & Corrosion resistant structure;
- IP rating up to 68;
- Lifespan > 30000hours.



Installation:

Connect to driver
Connect to DC12/24V



MK-YC Plastics Series

IP68



Specification

Power:	12W 18W 24W 36W
Size:	Ø210mm Ø230mm Ø290mm
Material:	Plastics
IP Rating:	IP68
Input:	DC12/24V
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Use SMD LED, high lumen output;
- Low power consumption & heat radiation;
- Elegant design with solid & Corrosion resistant structure;
- IP rating up to 68;
- Lifespan > 30000hours.



Installation:

Connect to driver
Connect to DC12/24V



MK-YC-SMD Series

IP68



Specification

Power:	12W 18W
Size:	Ø230mm
Material:	Stainless Steel
IP Rating:	IP68
Input:	DC12/24V
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Use SMD LED, high lumen output;
- Low power consumption & heat radiation;
- Elegant design with solid & Corrosion resistant structure;
- IP rating up to 68;
- Lifespan > 30000hours.



Installation:

Connect to driver
Connect to DC12/24V

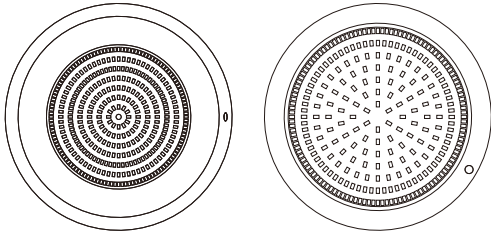

MK-YC Stainless Steel Series

IP68



Specification

Power:	12W 18W 24W 36W
Size:	Ø210mm Ø230mm Ø290mm
Material:	Stainless Steel
IP Rating:	IP68
Input:	DC12/24V
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Use SMD LED, high lumen output;
- Low power consumption & heat radiation;
- Elegant design with solid & Corrosion resistant structure;
- IP rating up to 68;
- Lifespan > 30000hours.



Installation:

Connect to driver
Connect to DC12/24V



MK-YC7401 Series

IP68



MK-YC7401-6W MK-YC7401-18W MK-YC7401-43W

Specification

Power:	6W 18W 43W
Size:	45x79mm 50x102mm 55x122mm
Material:	Stainless Steel
IP Rating:	IP68
Input:	DC24V
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Use SMD LED, high lumen output;
- Low power consumption & heat radiation;
- Elegant design with solid & Corrosion resistant structure;
- IP rating up to 68;
- Lifespan > 30000hours.



Installation:

Connect to driver
Connect to DC12/24V




LED Corner Step Light

Products working temperature is -30°C~ 65'C so that they can adjust to various ranges of temperature. Products can be widely used in buildings, indoor & outdoor floors, stairs,corridors, meeting rooms, showrooms, shopping malls, hotels and other places as decoration and lighting as well.



MK-D6601

IP65

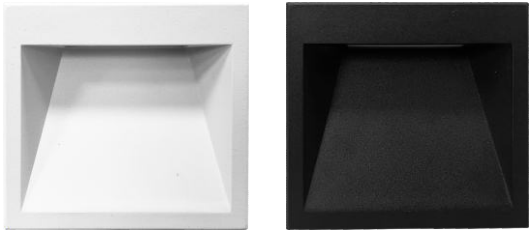


3000K 4000K 6500K

Specification	
Power:	3W
Size:	85x85mm
Material:	Aluminum
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+


Installation:

Connect to AC85-265V



Features


- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.



IP54




MK-Y09115



MK-D09115

3000K 4000K 6500K

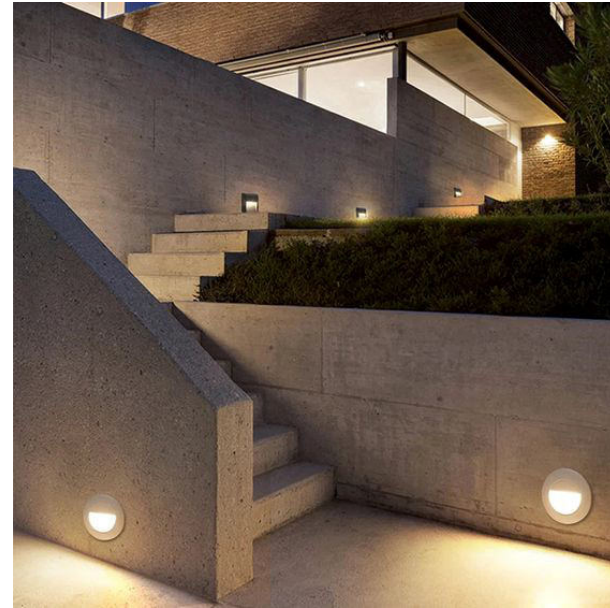

IP54



MK-D9901Y-S

MK-D9901F-S

MK-D9901Y-L

MK-D9901F-L

3000K 4000K 6500K




Specification

Power:	3W
Size:	Ø85x60mm L85xW85xH60mm
Material:	Aluminum
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square and round design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.



Installation:

Connect to AC85-265V

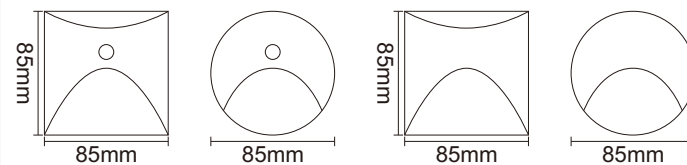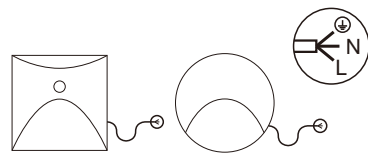


Specification

Power:	2W 3W
Size:	Ø48xH82mm L48xW48xH82mm Ø80xH50mm L80xW80xH50mm
Material:	Aluminum
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square and round design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.



Installation:

Connect to AC85-265V

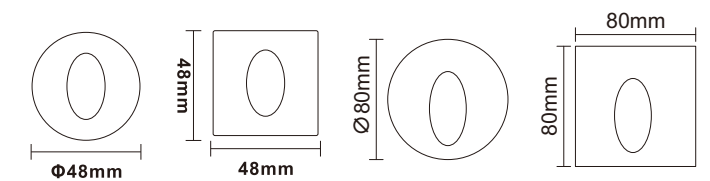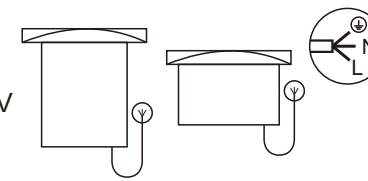


IP54




MK-DM9901P

3000K 4000K 6500K

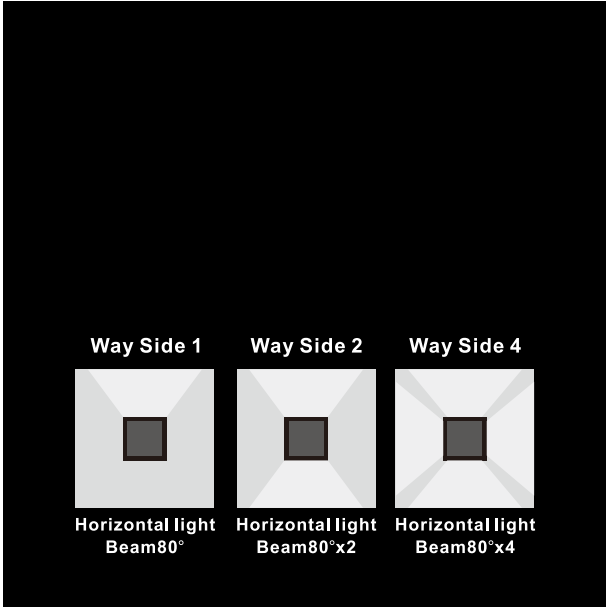

IP65

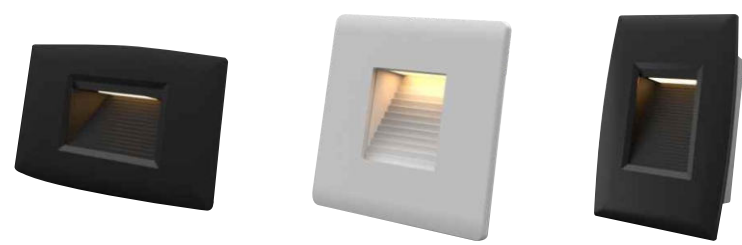

MK-2526

MK-2527

MK-2528

3000K 4000K 6500K



Specification

Power:	0.5W 1W 2W
Size:	L55xW55xH90mm
Material:	PC with UV Resistance
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.



Installation:

Connect to AC85-265V

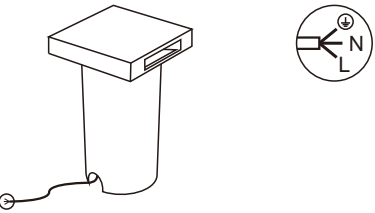

Specification

Power:	2W
Size:	124x82x48mm 86x90x48mm
Material:	PC
IP Rating:	IP65
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.



Installation:

Connect to AC85-265V

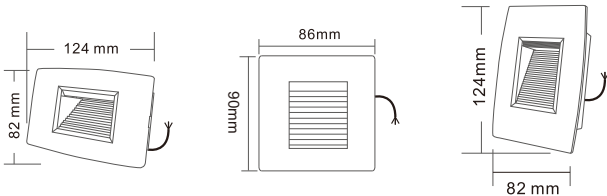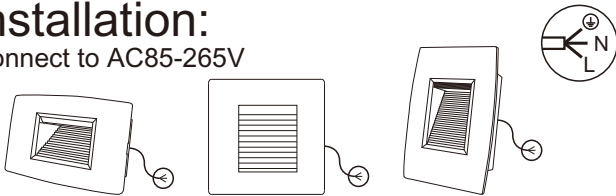

IP54



MK-690Y



MK-690Y-L-Senor



MK-690L



MK-690L-Senor




Specification

Power:	3W
Size:	Ø68mm Ø82mm 58x58x48mm 85x85x56mm
Material:	Aluminum
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square and round design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.



Installation:

Connect to AC85-265V

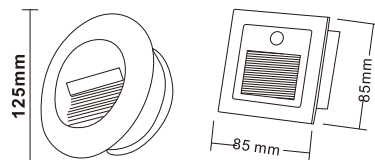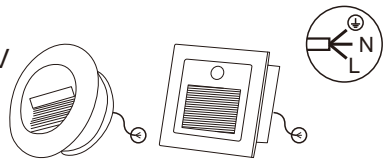

IP54



MK-2705R



MK-2705L3



MK-2705L4



MK-2705L5



MK-2705S



MK-2705M



MK-2705L1



MK-2705L2




Specification

Power:	3W
Size:	Ø82x50mm 90x40x45mm 145x40x45mm 180x40x45mm 85x85x50mm 100x60x50mm 110x45x54mm 210x60x60mm
Material:	Aluminum
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+

Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square and round design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.

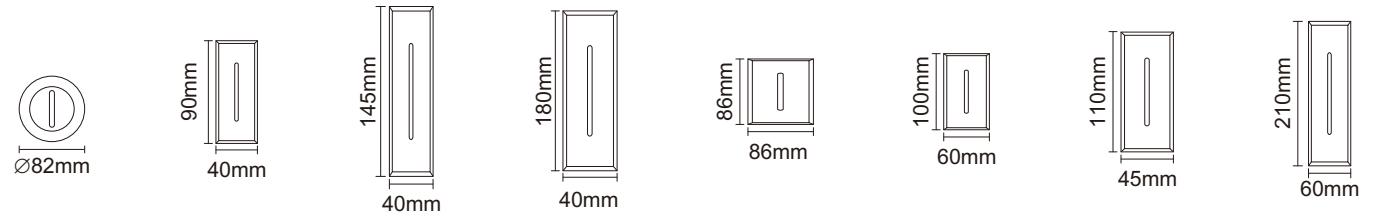

IP54




MK-D09091



MK-D09092

3000K 4000K 6500K


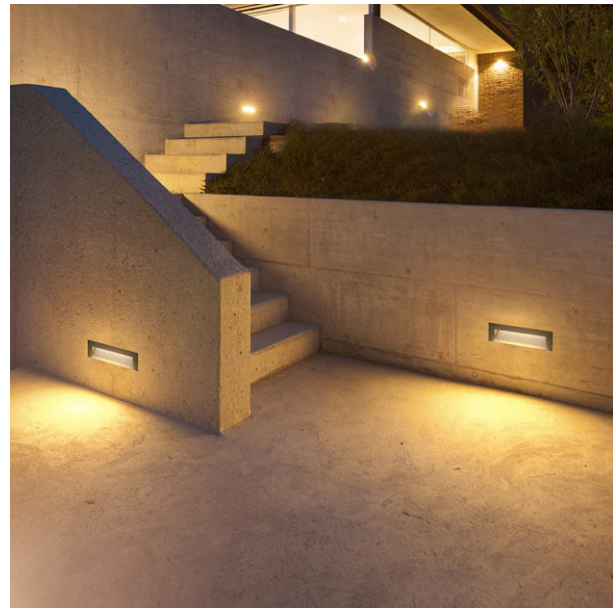


Specification

Power:	3W
Size:	125x55x54mm 145x55x50mm
Material:	Aluminum
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+


Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.

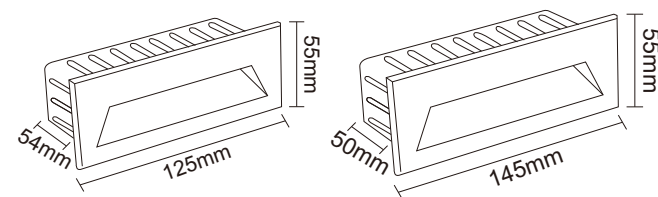

Installation:


Connect to AC85-265V



IP54




MK-2702S



MK-2701S



MK-2702L



MK-2701L

3000K 4000K 6500K




Specification

Power:	6W
Size:	150x70mm 120x85mm 170x70mm 110x110mm
Material:	Aluminum
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+


Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.

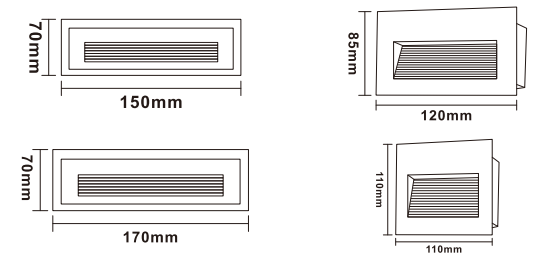

Installation:

Connect to AC85-265V



IP54



MK-2703S

MK-2703L



MK-D09042

MK-D09044

MK-D09046

3000K 4000K 6500K



IP54



MK-2704S

MK-2704L

MK-D705L

3000K 4000K 6500K





Specification

Power:	3W 6W
Size:	100x58x63mm 145x85x55mm 108x85x50mm 205x85x50mm 210x65x60mm
Material:	Aluminum
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+


Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.

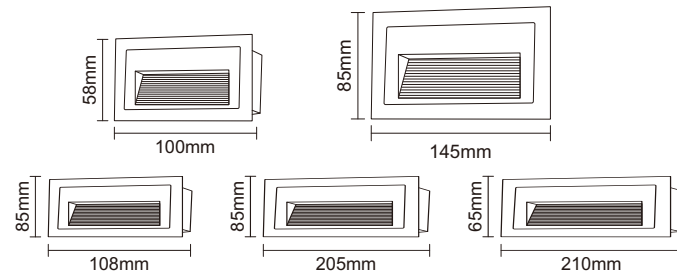

Installation:

Connect to AC85-265V




Specification

Power:	3W 6W
Size:	60x100mm 70x150mm 210x65mm
Material:	Aluminum
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+


Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.

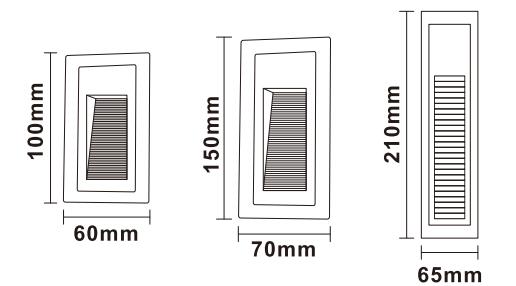

Installation:

Connect to AC85-265V

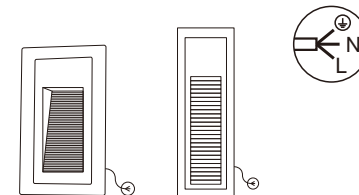



Specification

Power:	3W
Size:	Ø117xH32mm L117xW117xH33mm Ø117xH31mm L117xW117xH31mm
Material:	Aluminum
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square and round design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.



Installation:

Connect to AC85-265V

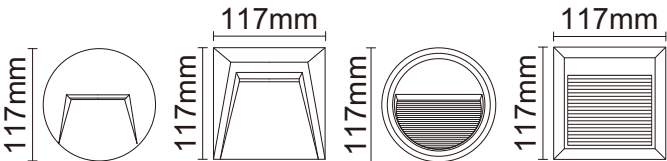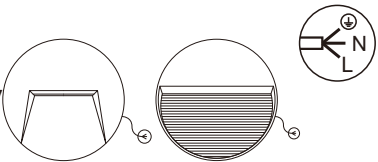

Specification

Power:	3W
Size:	Ø117x32mm L117xW117xH32mm
Material:	Aluminum
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square and round design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Connect to AC85-265V

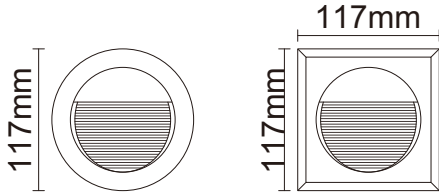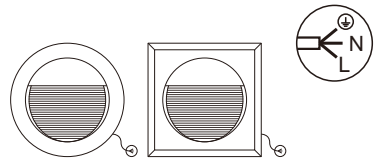

IP54

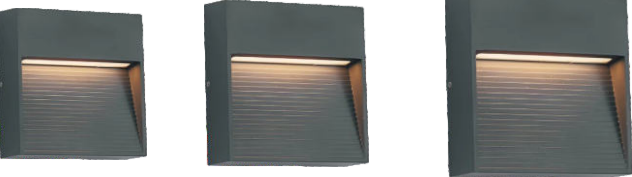


MK-D09074 MK-D09075 MK-D09076

3000K 4000K 6500K



IP54

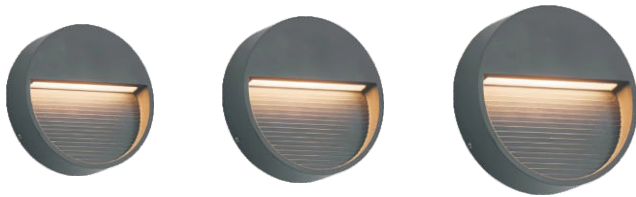

MK-D09077 MK-D09078 MK-D09079

3000K 4000K 6500K



Specification

Power:	3W 6W 6W
Size:	117x117x32mm 150x150x32mm 200x200x32mm
Material:	Aluminum
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.



Installation:

Connect to AC85-265V

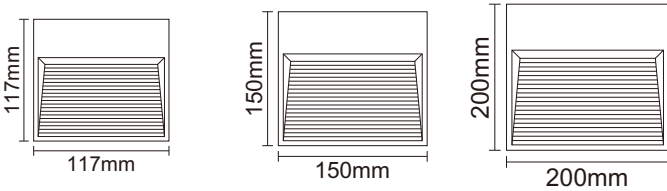

Specification

Power:	3W 6W 6W
Size:	Ø117x32mm Ø150x32mm Ø200x32mm
Material:	Aluminum
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special round design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.



Installation:

Connect to AC85-265V

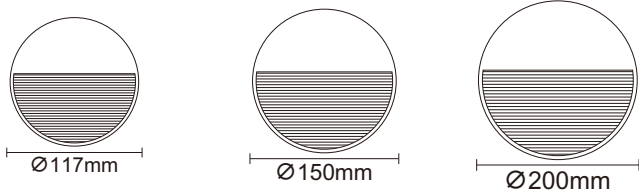

IP54



MK-D09080



MK-D09081



MK-D09082

3000K 4000K 6500K



Specification

Power:	3W 6W 6W
Size:	117x117x32mm 150x150x32mm 200x200x32mm
Material:	Aluminum
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+





Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.



Installation:

Connect to AC85-265V



IP54



MK-D09083




MK-D09084



MK-D09085

3000K 4000K 6500K

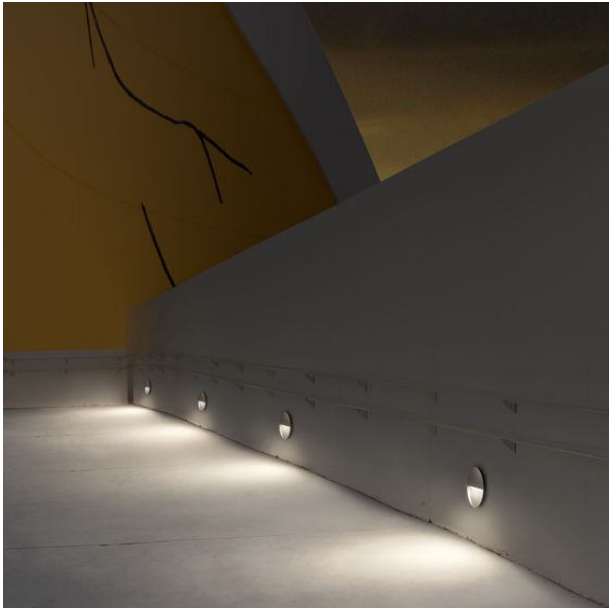

Specification

Power:	3W 6W 6W
Size:	Ø117x32mm Ø150x32mm Ø200x32mm
Material:	Aluminum
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+





Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special round design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.



Installation:

Connect to AC85-265V



IP54



MK-D09086

MK-D09087

MK-D09088

3000K 4000K 6500K



Specification

Power:	6W
Size:	200x90x32mm 250x95x32mm 270x110x32mm
Material:	Aluminum
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.



Installation:

Connect to AC85-265V

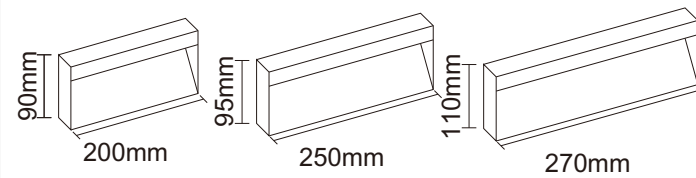

IP54



MK-F111S



MK-F111L




MK-F111L-竖



MK-F111L-横

3000K 4000K 6500K



Specification

Power:	3W 6W
Size:	L145xW70xH62mm L185xW85xH68mm L160xW100xH65mm L160xW100xH65mm
Material:	Aluminum
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.



Installation:

Connect to AC85-265V

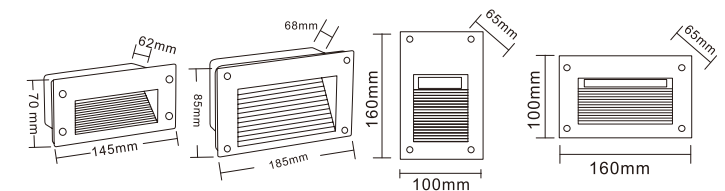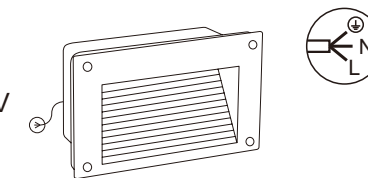


MK-D691

IP54



MK-D691-A



MK-D691-B



MK-D691-C




Specification

Power:	5W 6W 3W
Size:	230x81x28mm 210x60x28mm 170x81x28mm
Material:	Aluminum
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+


Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.

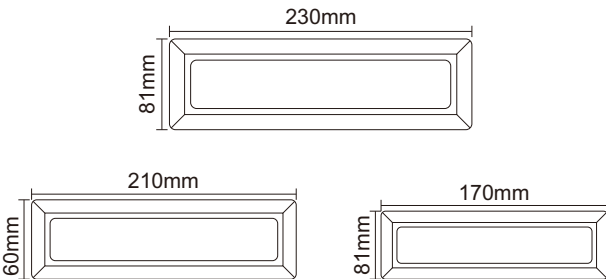


Installation:

Connect to AC85-265V



MK-2682

IP54

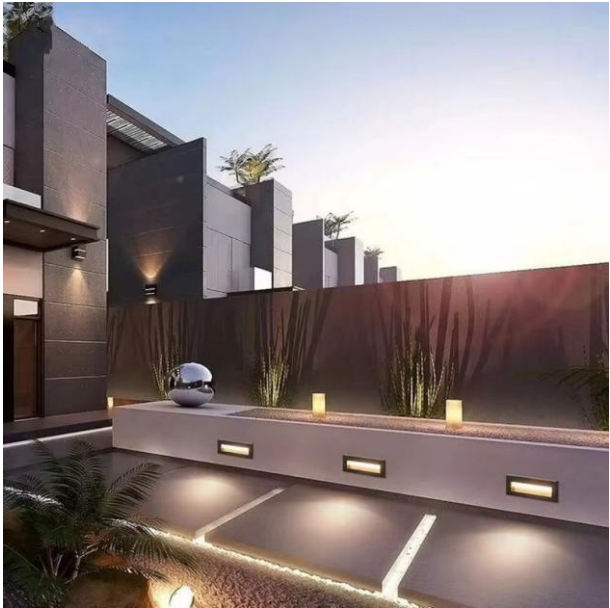


Specification

Power:	3W 6W
Size:	170x81x28mm 210x60x28mm 230x81x28mm 260x81x28mm
Material:	Aluminum
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+


Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.

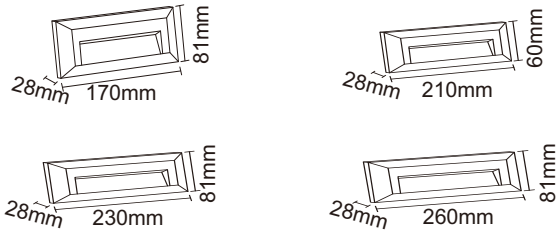


Installation:

Connect to AC85-265V




IP54

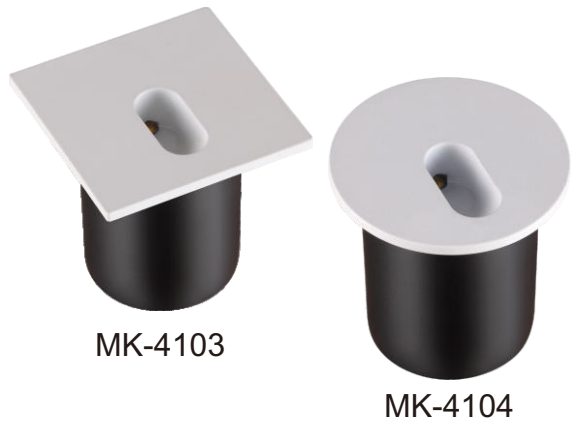


MK-4103

MK-4104

3000K 4000K 6500K

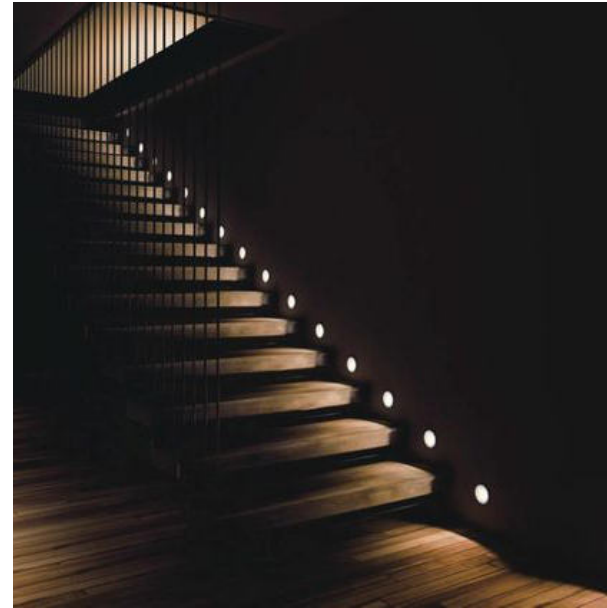


IP20

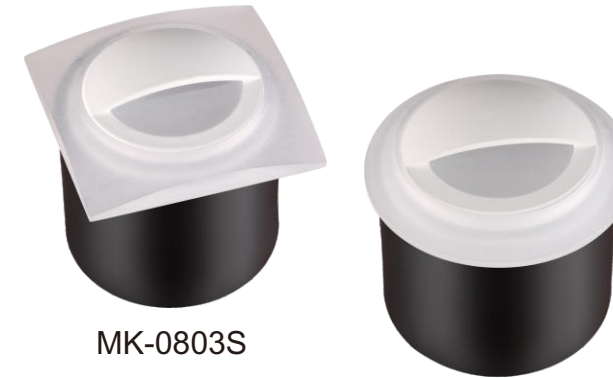

MK-0803S

MK-0803R

3000K 4000K 6500K

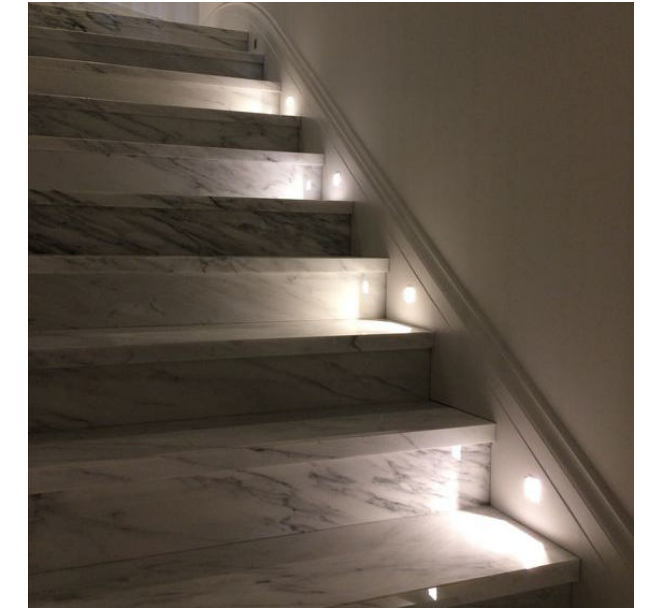


Specification

Power:	3W
Size:	60x60xH55mm Ø60xH55mm
Material:	Aluminum
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square and round design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.



Installation:

Connect to AC85-265V

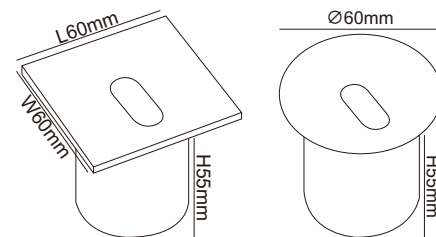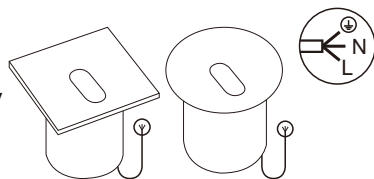


Specification

Power:	3W
Size:	60x60xH55mm Ø60xH55mm
Material:	Aluminum
IP Rating:	IP20
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square and round design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.





Installation:

Connect to AC85-265V

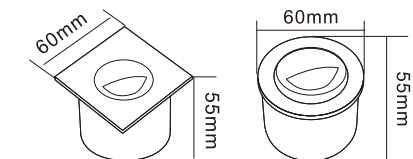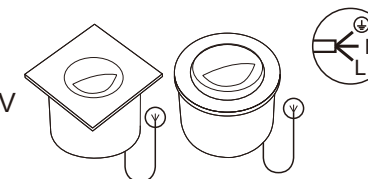

MK-D691

IP54

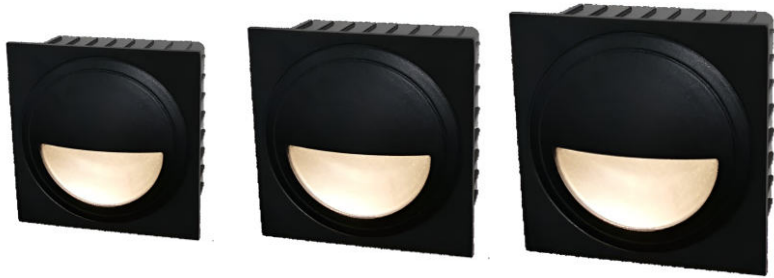

Specification

Power:	3W 5W 10W
Size:	86x86x50mm 110x110x60mm 160x160x60mm
Material:	Aluminum
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Connect to AC85-265V

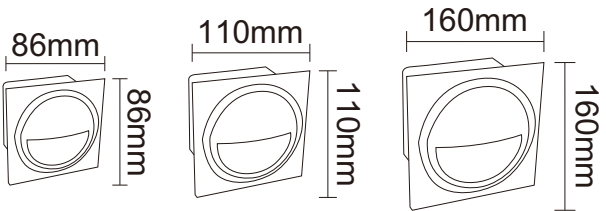

IP54



Specification

Power:	3W
Size:	70x70x55mm 105x105x55mm
Material:	Aluminum + Stainless steel
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.



Installation:

Connect to AC85-265V

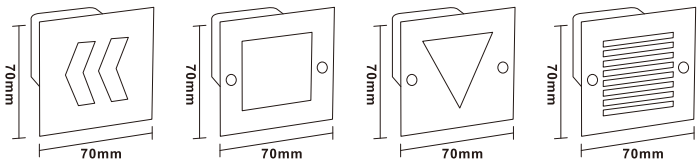

IP54



MK-D26A




MK-D26B



MK-D26C



MK-D26D





Specification

Power:	3W
Size:	110x45x55mm 170x70x55mm
Material:	Aluminum + Stainless steel
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+


Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.

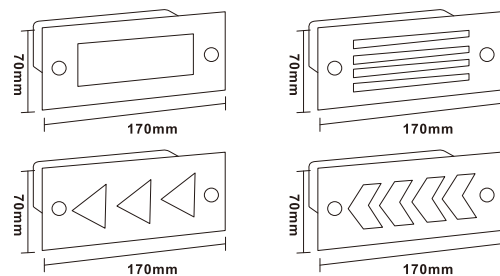


Installation:


Connect to AC85-265V



IP54




MK-D09093



MK-D09094



MK-D09095


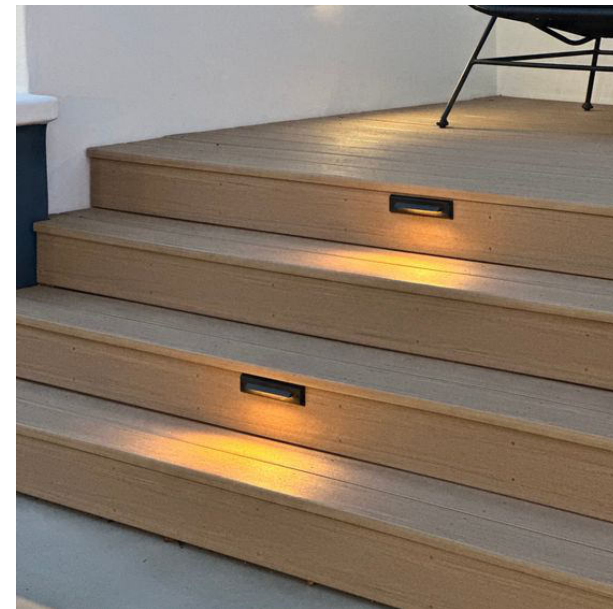


Specification

Power:	3W
Size:	145x45x45mm 185x40x45mm 200x45x45mm
Material:	Aluminum
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+

Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.

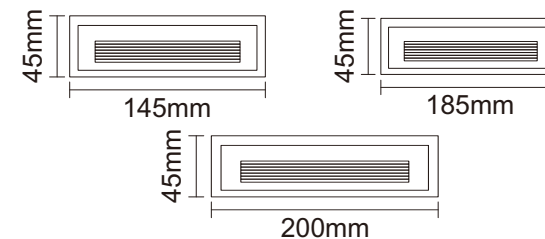

Installation:

Connect to AC85-265V




IP54




3000K 4000K 6500K



IP54

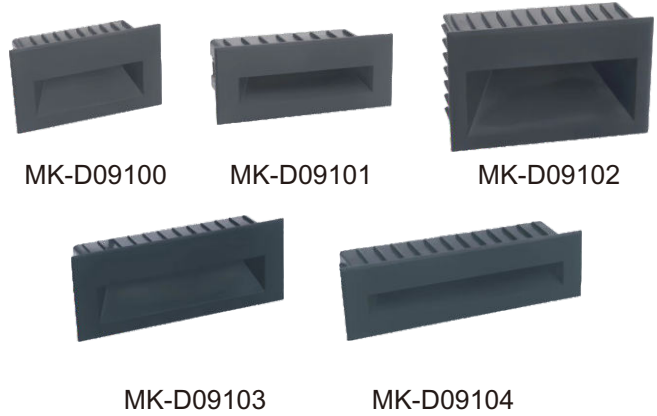

3000K 4000K 6500K

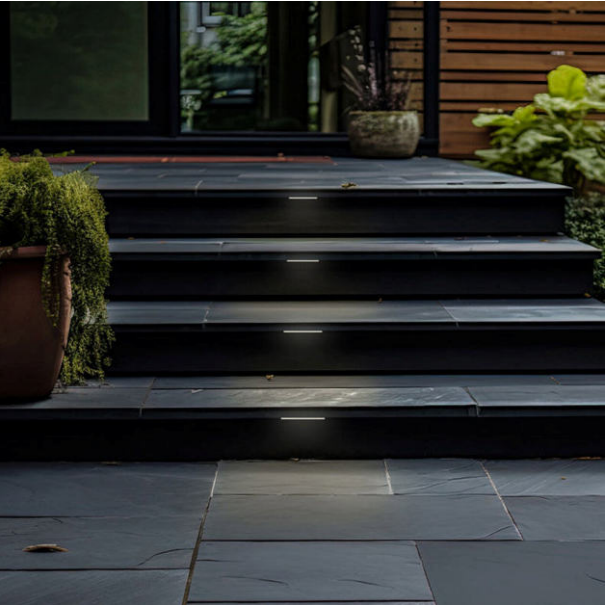

Specification

Power:	3W 5W 5-10W
Size:	110x45x55mm 115x85x57mm 160x100x58mm 255x75x58mm
Material:	Aluminum
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+


Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.



Installation:

Connect to AC85-265V



Specification

Power:	3-5W
Size:	145x85x56mm 160x65x60mm 162x100x62mm 170x70x50mm 220x65x55mm
Material:	Aluminum
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.




Installation:

Connect to AC85-265V

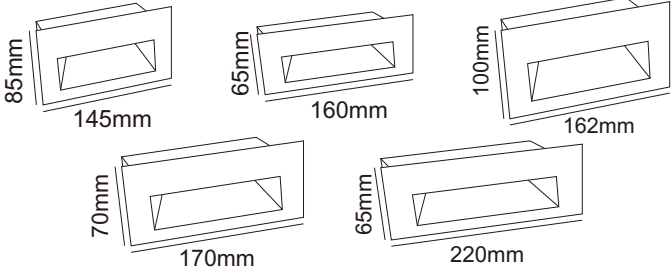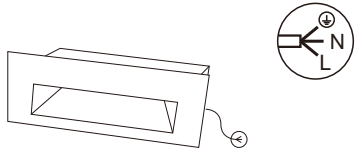

IP54

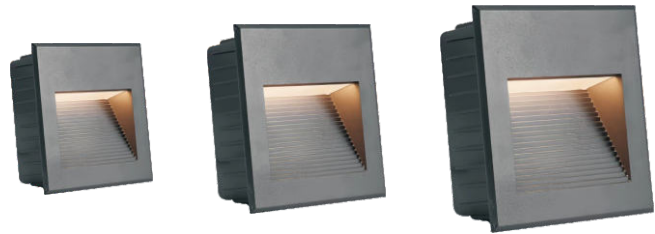


MK-D09105

MK-D09106

MK-D09107

3000K 4000K 6500K

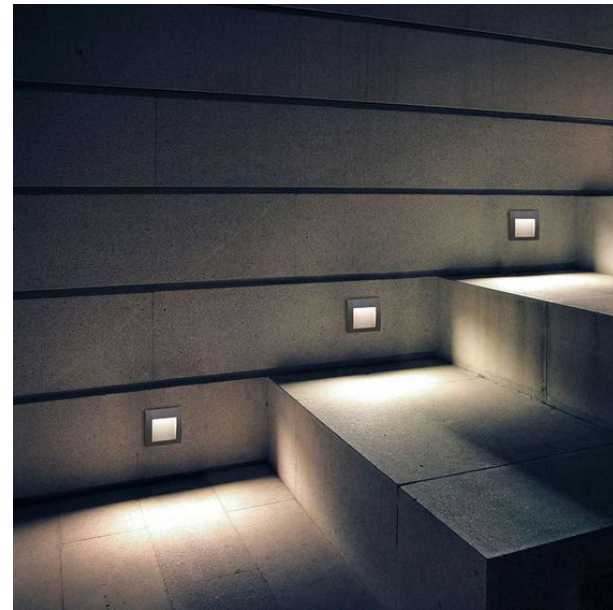


Specification

Power:	6W 6-10W
Size:	160x160mm 220x220mm 245x260mm
Material:	Aluminum
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.



Installation:

Connect to AC85-265V

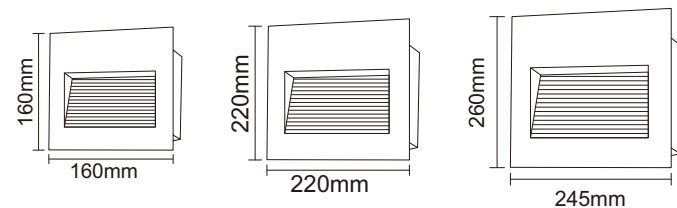

IP54



MK-D49001-L



MK-D49002-L



MK-D49001-S



MK-D49002-S



MK-D49003-S



MK-D49004-S

3000K 4000K 6500K




Specification

Power:	3W
Size:	85x85x46mm 58x58x46mm
Material:	Aluminum
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+



Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.



Installation:


Connect to AC85-265V

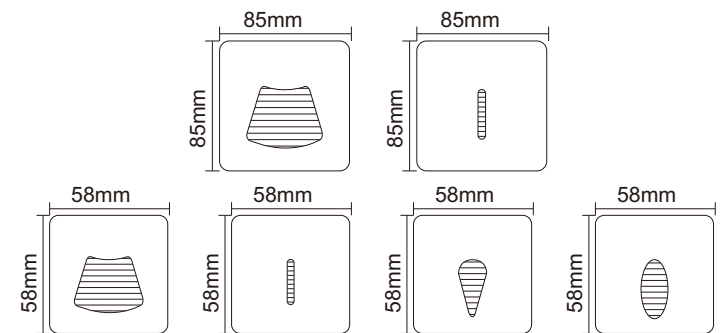

IP54



MK-D49005



MK-D49006



MK-D49007

3000K 4000K 6500K




Specification

Power:	3W
Size:	105*59*47mm
Material:	Aluminum
IP Rating:	IP54
Input:	AC85-265V 50/60Hz
Warranty:	2 Years
PF:	≥0.5
CRI:	80+


Installation:

Connect to AC85-265V



Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square design;
- With easy & convenient installation;
- Long lifespan over 50000 hours.

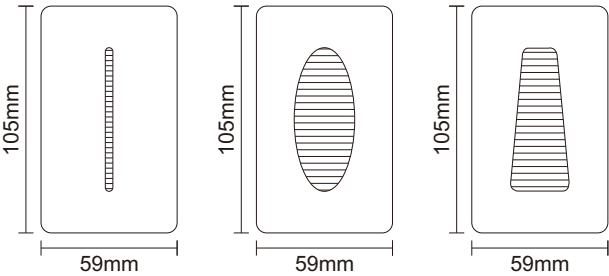

LED Spike light
New Model
Power:5W-7W
Size:Ø65xH300mm

