

OSRAM

PHILIPS

CREE

EPISTAR

NICHIA

SEOUL

SAMSUNG



中山市镁特丽照明有限公司
MINK LED LIGHTING CO.,LTD

Phone number

+86 134 2040 8061

+853 6855 5317

Email

maggie@minkled.cn

maggieguzhen@163.com

Address

Floor 5, Building 4th, NO.33, Dongxing East Road, Guzhen Town, Zhongshan City



MIK 镁特丽

Explore the beauty of nature.

探索自然之美



2025-2026
Outdoor wall light



Welcome to the
outdoor world of MK.

公司简介/Company Profile



中山市镁特丽照明有限公司是一家专注于户外照明产品设计和生产的综合性公司。中山市镁特丽光电有限公司成立于2011年,我们有一百多名工人,厂房面积6000m²,我们的产品销往欧洲、南美、东南亚、中东等。“MK,你的防水专家”是我们的使命,用最好的建筑照明解决方案和视觉舒适度创造情感。我们坚持创新务实的发展理念,超越自己,并追求卓越。我们一直专注于产品开发,始终以客户为中心,依靠不断提升的创新能力,整合灵活的单品定制能力,日益完善的配送能力和不断完善的售后服务成为深受客户信赖的品牌,公司以强大的开发能力为基础,致力于为园林、庭院氛围照明打造全系列照明产品。目前,公司主要产品有五大系列:地插灯、地埋灯、户外壁灯、墙角灯、庭院灯。中山市镁特丽照明有限公司不断加快创新设计和研发的步伐,为客户提供优质、极致的服务是公司的发展准则,将低碳、环保、节能贯彻到底结合市场需求为客户创造更大的价值。

Zhongshan MINK LED LIGHTING CO.,LTD. is a comprehensive company focusing on the design and production of outdoor lighting products. Zhongshan MINK LED Lighting Co., Ltd. was established in 2011. We have more than 100 workers and 6000 square meters factory. We sold to Europe, South America, southeast Asia, middle east and so on."MK, your waterproof expert" is our mission to create emotions with the best architectural lighting solutions and visual comfort. We adhere to the innovative and pragmatic development concept, surpass ourselves, and pursue excellence. We have always focused on product development, always customer-centric, relying on the continuous improvement of innovation capabilities, integrating flexible single product customization capabilities, increasingly improved distribution capabilities and continuously improved after-sales service to become a brand trusted by customers. The company is based on strong development capabilities and is committed to creating a full range of lighting products for garden and courtyard atmosphere lighting. At present, the company's main products include five series: ground plug lamps, underground lamps, outdoor wall lamps, corner lamps, and garden lamps. Zhongshan MINK LED LIGHTING CO.,LTD. continues to accelerate the pace of innovative design and research and development. Providing customers with high-quality and extreme services is the company's development principle. It will implement low-carbon, environmental protection, and energy saving to the end and combine market demand to create greater value for customers.

公司展厅/Company Showroom



公司展厅 / Company Showroom



防水测试仪器
Simulate Waterproof Tester



雷击浪涌测试仪
Lightning Surge Generator




多路温度测试仪
Multiplex Temperature meter



光光电综合测试系统
Spectroscopic analysis system



ZC93-3型绝缘电阻表
ZC93-3 Type insulation resistance meter




老化测试
Aging test



装配线
Production Line



包装过程
Packaging process



CERTIFICATE (HAVE CE,GS,ROHS AND ERP6000 HOURS)




MK-W21001


Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65



MK-W21001-1



MK-W21001-2

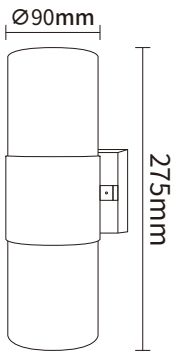



Product Detaills Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W21001-1	1xE27	Ø90x190mm	E27	AC85-265V 50/60Hz	/	/	/
MK-W21001-2	2xE27	Ø90x275mm	E27	AC85-265V 50/60Hz	/	/	/

MK-W9906 Series

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP54

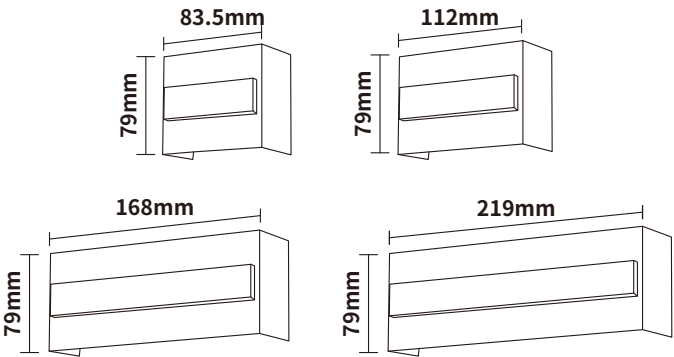

MK-W9906-2



MK-W9906-4



MK-W9906-6



MK-W9906-8

Product Detaills Parameters:




Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W9906-2	2x1+2W	83.5x79x43mm	SMD+COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W9906-4	4x1+4W	112x79x43mm	SMD+COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W9906-6	6x1+6W	168x79x43mm	SMD+COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W9906-8	8x1+8W	219x79x43mm	SMD+COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5



Color Temperature:3000K/4000K/6500K

Warranty: 2 Years

IP Rating:IP65

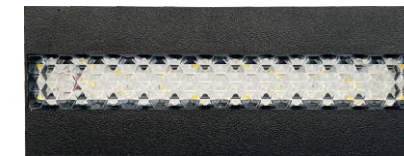

MK-W3102P-2

MK-W3102P-4

MK-W3102P-6

MK-W3102P-8



MK-W0415-2

MK-W0415-4

MK-W0415-6

MK-W0415-8







Product Details Parameters:



Model	Wattage	Product size	Light source	Input voltage	Material	Color
MK-W3102P-2	4W	80x40x77mm	SMD	AC220-240V 50/60Hz	Plastics + PC	Black
MK-W3102P-4	6W	95x40x77mm	SMD	AC220-240V 50/60Hz	Plastics + PC	Black
MK-W3102P-6	8W	150x40x77mm	SMD	AC220-240V 50/60Hz	Plastics + PC	Black
MK-W3102P-8	10W	200x40x77mm	SMD	AC220-240V 50/60Hz	Plastics + PC	Black
MK-W0415-2	2x1W+2W	70x80x45mm	SMD	AC220-240V 50/60Hz	Aluminum + PC	Black
MK-W0415-4	4x1W+3W	120x80x45mm	SMD	AC220-240V 50/60Hz	Aluminum + PC	Black
MK-W0415-6	6x1W+4W	170x80x45mm	SMD	AC220-240V 50/60Hz	Aluminum + PC	Black
MK-W0415-8	8x1W+4W	220x80x45mm	SMD	AC220-240V 50/60Hz	Aluminum + PC	Black

MK-W9903 MK-W9904

Material:Die-casting Aluminum (THICK HOUSING)
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65








Product Detaills Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W9903-12	12x2W CREE	320x90x55mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W9904-12	12x2W CREE	320x90x55mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W9903-6	6x2W CREE	170x80x35mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W9904-6	6x2W CREE	170x80x35mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-W0374 Series

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

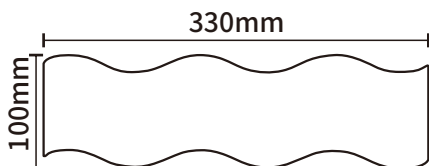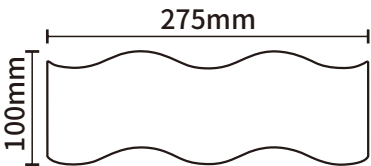



Product Detaills Parameters:




Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W0374-4	4x2W	100x100x40mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W0374-6	6x2W	165x100x40mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W0374-8	8x2W	220x100x40mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W0374-10	10x2W	275x100x40mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W0374-12	12x2W	330x100x40mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-W9902

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

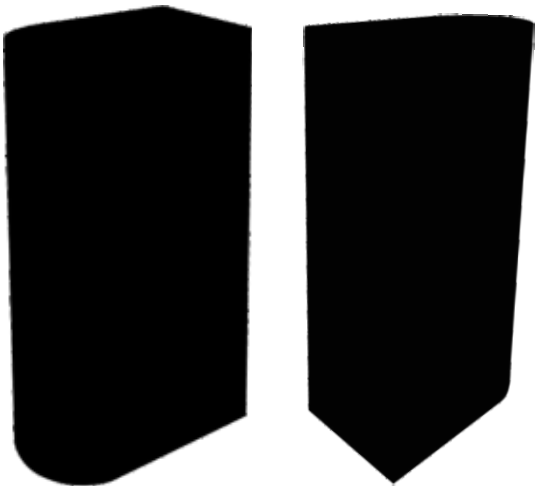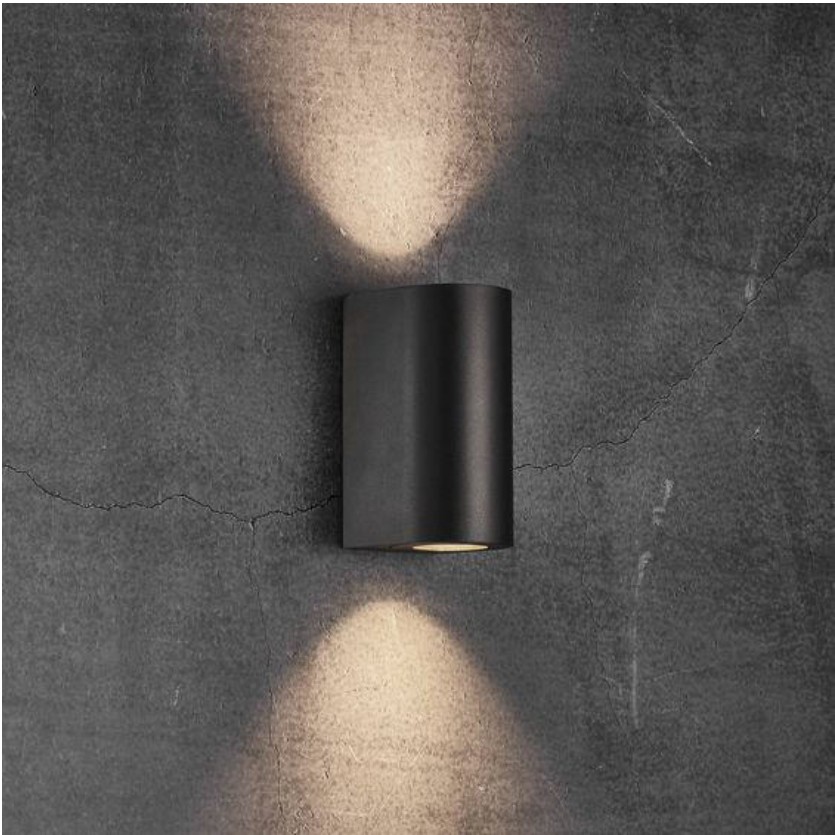

MK-W9902

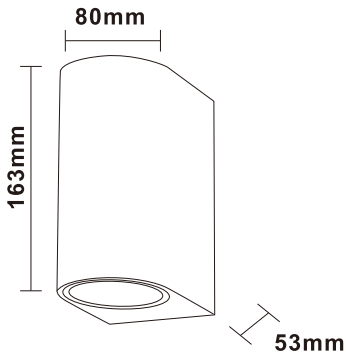




Product Detaills Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W9902	2x7W	163x80x53mm	SMD+COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-W9901P

Material:PC with UV Resistance
Color Temperature:3000K/4000K/6500K
IP Rating:IP65

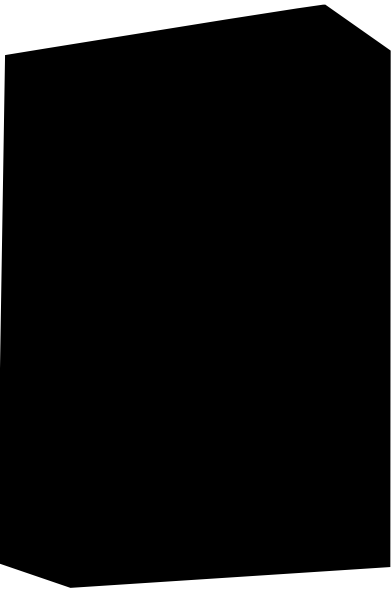

MK-W9901P-4W

Frame color(regular color 3 options)
Accept more color customized

White

Grey

Black

3 Types of Light Performance

Product Detaills Parameters:




Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W9901P	4W	85x124x30mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-W6613

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP54

3CCT

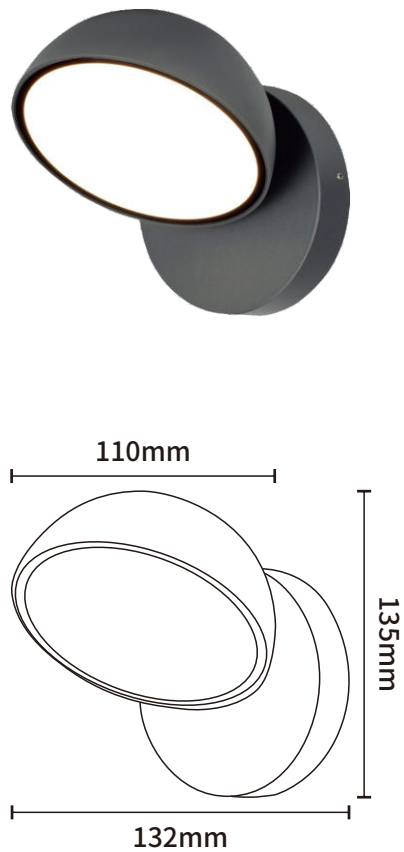

Product Detaills Parameters:




Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W6613	12W	Ø110x132x135mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-6611

Material:Die-casting Aluminum+PC / Plastic
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP54

3CCT

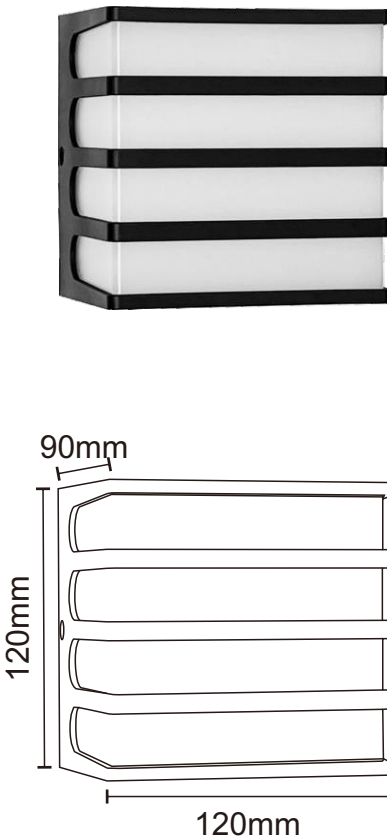

Product Detaills Parameters:




Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-6611-AL	6W	120x90x120mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-6611-PC	6W	120x90x120mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-W23208 Series


Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65



MK-W23208-1

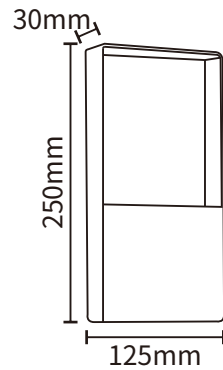

MK-W23208-2

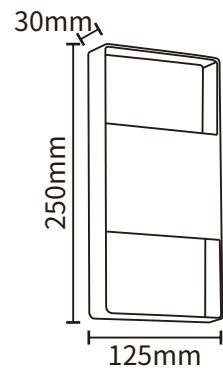

Product Details Parameters:




Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W23208-1	5W	250x30x125mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W23208-2	2x5W	250x30x125mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-W23209 Series


Material: Die-casting Aluminum
Color Temperature: 3000K/4000K/6500K
Warranty: 2 Years
IP Rating: IP65



MK-W23209-1



MK-W23209-2





Product Details Parameters:




Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W23209-1	5W	180x30x180mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W23209-2	2x5W	180x30x180mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-B47-1 Series

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

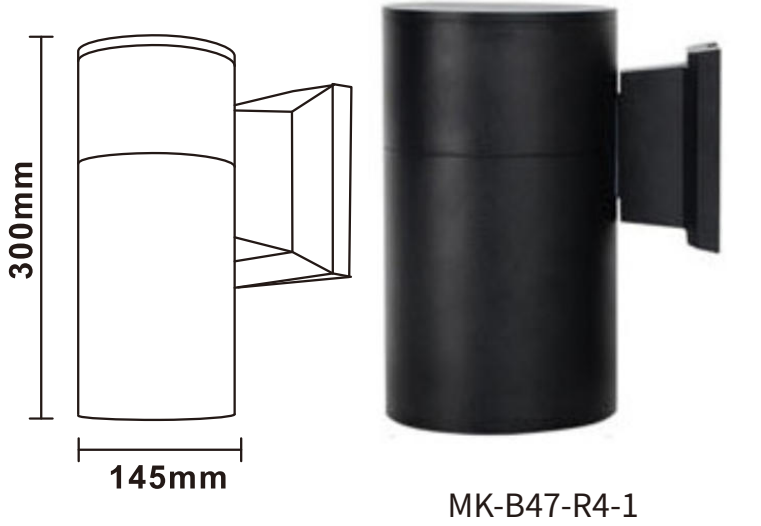

MK-B47-R4-1

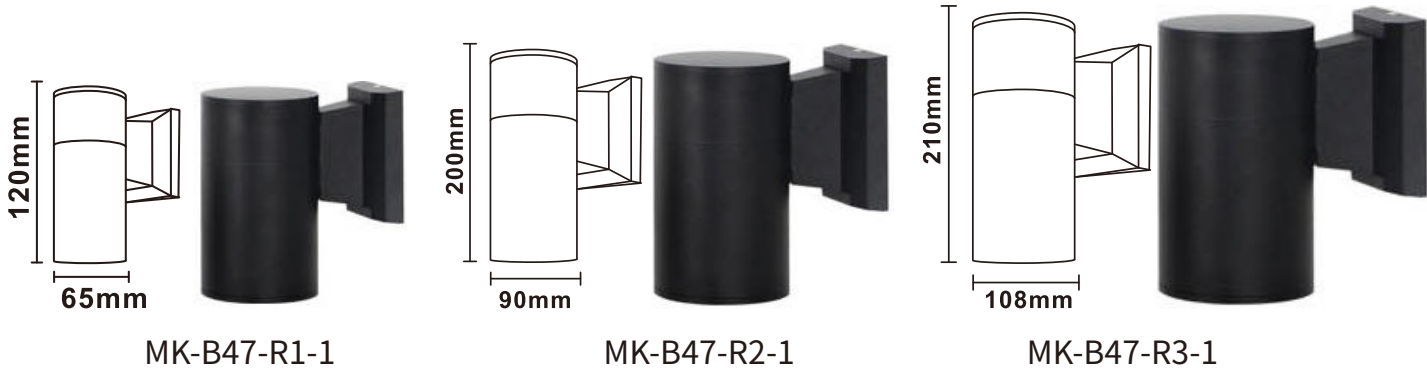



Product Detaills Parameters:




Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-B47-R1-1	GU10/3W	65x120mm	GU10/COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-B47-R2-1	GU10/5W	90x200mm	GU10/COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-B47-R3-1	GU10/10W	108x210mm	GU10/COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-B47-R4-1	GU10/15W	145x300mm	GU10/COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-B47-2 Series

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

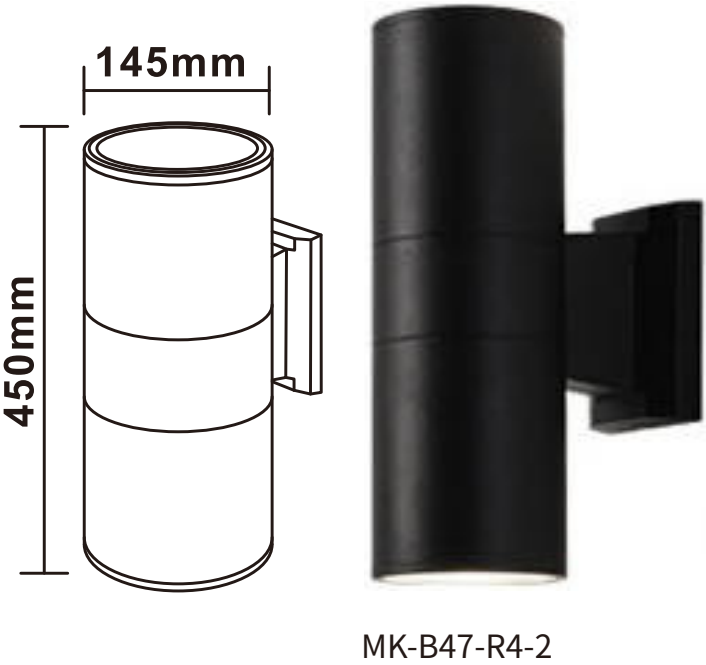

MK-B47-R4-2

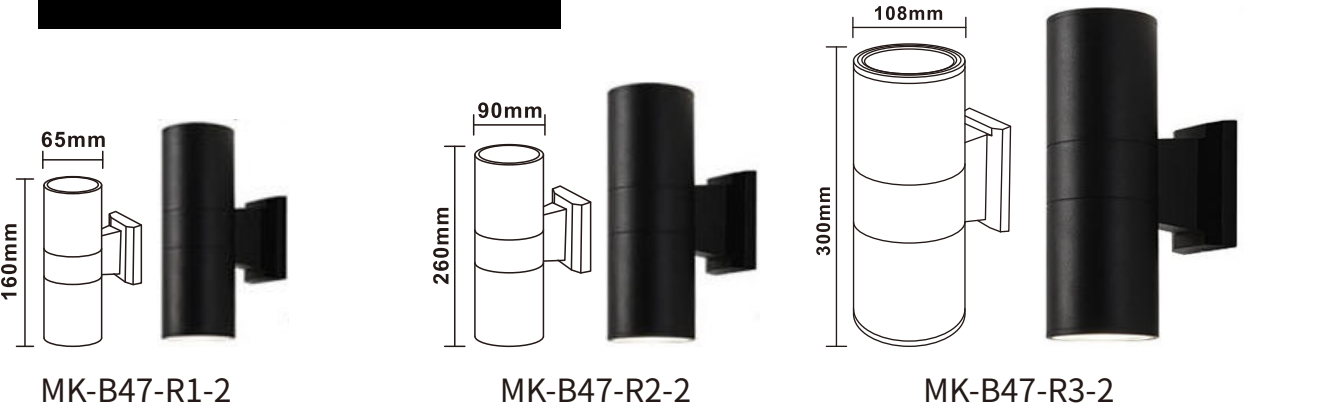


Product Detaills Parameters:




Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-B47-R1-2	GU10/2x3W	65x160mm	GU10/COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-B47-R2-2	GU10/2x5W	90x260mm	GU10/COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-B47-R3-2	GU10/2x10W	108x300mm	GU10/COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-B47-R4-2	GU10/2x15W	145x450mm	GU10/COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-B47-99 Series


Material:Die-casting Aluminum / Stainless steel
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65



MK-B47-9906-1 MK-B47-9902-1



MK-B47-9906-2 MK-B47-9902-2



MK-B47-9904-2 MK-B47-9905-2


Product Detaill Parameters:




Model	Wattage	Product size	Material	Input voltage	Light effect	CRI(Ra)	Power factor
MK-B47-9906-1	GU10	60x90x115mm	Stainless steel	AC85-265V	/	/	/
MK-B47-9902-1	GU10	60x90x115mm	Die-casting Aluminum	AC85-265V	/	/	/
MK-B47-9906-2	GU10	60x90x160mm	Stainless steel	AC85-265V	/	/	/
MK-B47-9902-2	GU10	60x90x160mm	Die-casting Aluminum	AC85-265V	/	/	/
MK-B47-9904-2	GU10	60x90x220mm	Stainless steel	AC85-265V	/	/	/
MK-B47-9905-2	GU10	60x90x220mm	Die-casting Aluminum	AC85-265V	/	/	/

MK-W9912 Series

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP54



MK-W9912-65-1

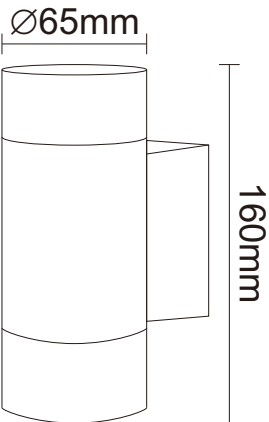

MK-W9912-65-2


Product Detaill Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W9912-65-1	1xGU10	Ø65x100mm	GU10	AC85-265V 50/60Hz	/	/	/
MK-W9912-65-2	2xGU10	Ø65x160mm	GU10	AC85-265V 50/60Hz	/	/	/
MK-W9912-90-1	1xGU10	Ø90x200mm	GU10	AC85-265V 50/60Hz	/	/	/
MK-W9912-90-2	2xGU10	Ø90x260mm	GU10	AC85-265V 50/60Hz	/	/	/
MK-W9912-108-1	1xGU10	Ø108x210mm	GU10	AC85-265V 50/60Hz	/	/	/
MK-W9912-108-2	2xGU10	Ø108x270mm	GU10	AC85-265V 50/60Hz	/	/	/

MK-W9905

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP54

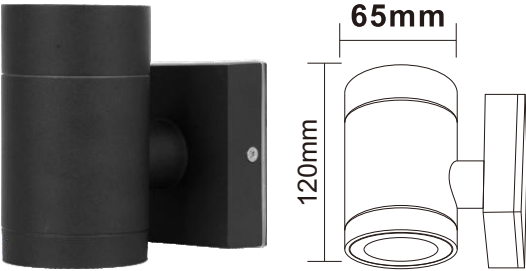

MK-W9905-1



MK-W9905-2


Product Detaills Parameters:




Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W9905-1	GU10	Ø65x120mm	GU10	AC85-265V 50/60Hz	/	/	/
MK-W9905-2	GU10	Ø65x145mm	GU10	AC85-265V 50/60Hz	/	/	/

MK-W5115 MK-W5116

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

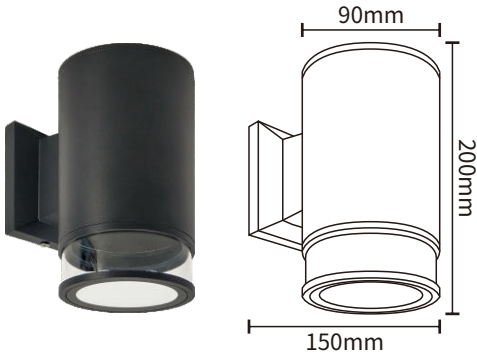

MK-W5115-1A

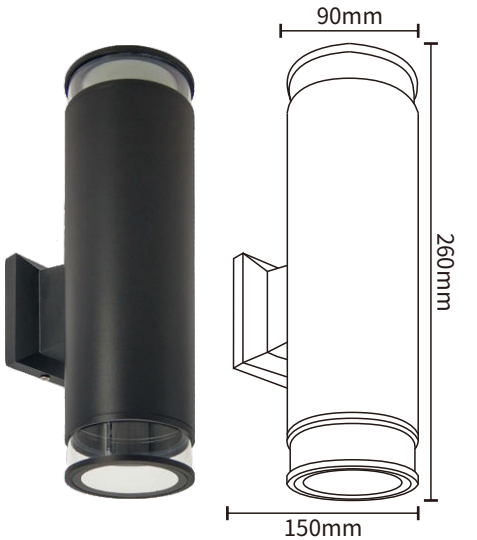

MK-W5116-2A


Product Detaills Parameters:




Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W5115-1A	1xGU10/E27	150x90x200mm	GU10/E27	AC220-240V 50/60Hz	/	/	/
MK-W5116-2A	2xGU10/E27	150x90x260mm	GU10/E27	AC220-240V 50/60Hz	/	/	/

MK-W5501

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP54

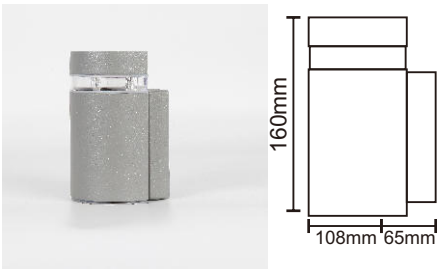

MK-W5501-1

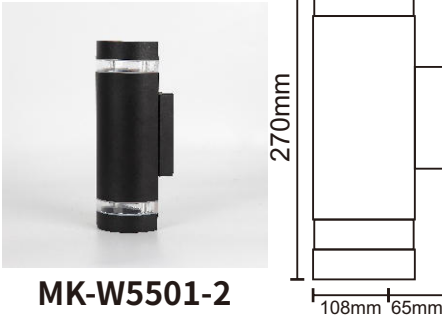

MK-W5501-2


Product Detaills Parameters:




Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W5501-1	1xGU10	108x65x160mm	GU10	AC85-265V 50/60Hz	/	/	/
MK-W5501-2	2xGU10	108x65x270mm	GU10	AC85-265V 50/60Hz	/	/	/

MK-W5502

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP54

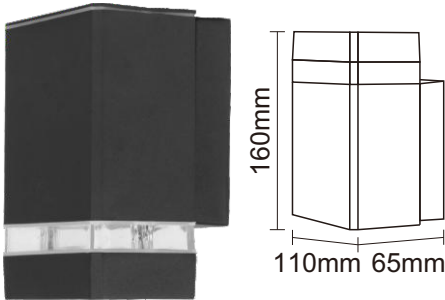

MK-W5502-1

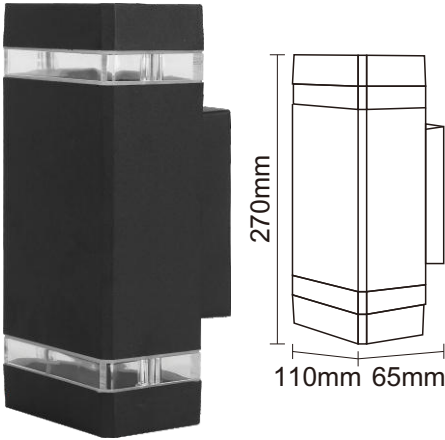

MK-W5502-2


Product Detaills Parameters:




Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W5502-1	1xGU10	110x65x160mm	GU10	AC85-265V 50/60Hz	/	/	/
MK-W5502-2	2xGU10	110x65x270mm	GU10	AC85-265V 50/60Hz	/	/	/

MK-W5503

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP54

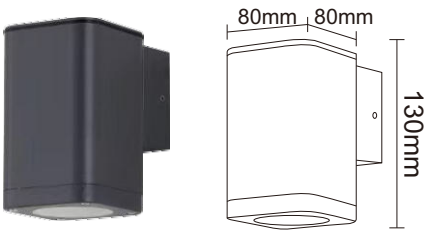

MK-W5503-1

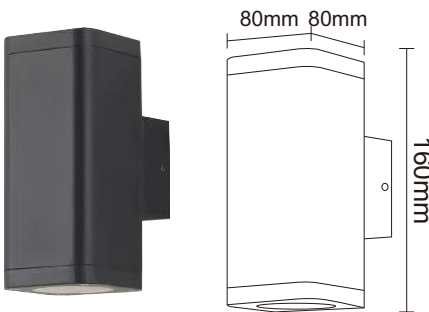

MK-W5503-2

Product Detaills Parameters:




Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W5503-1	1xGU10	80x80x130mm	GU10	AC85-265V 50/60Hz	/	/	/
MK-W5503-2	2xGU10	80x80x160mm	GU10	AC85-265V 50/60Hz	/	/	/


MK-813S MK-813M MK-813L

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65


3CCT

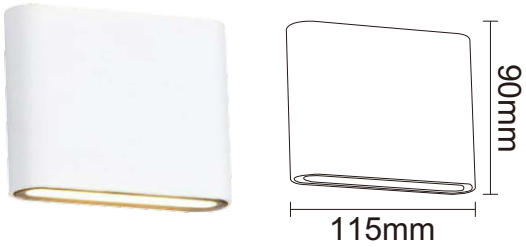

MK-813S

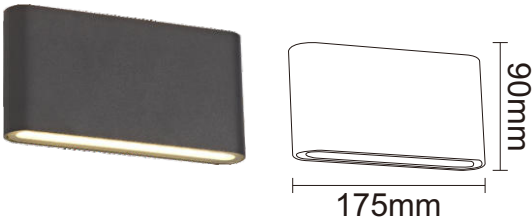

MK-813M

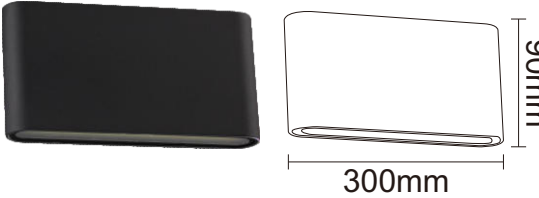

MK-813L

Product Detaills Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-813S	2x3W	115x90x35mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-813M	2x6W	175x90x35mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-813L	2x10W	300x90x35mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5


MK-2002S

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65


3CCT





Adjustable angle




MK-2002S




MK-2002R



MK-2002L



MK-2002S-200



Product Details Parameters:




Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-2002S	2x3W / G9	100x100x100mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-2002R	2x3W	100x100x100mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-2002L	2x10W	120x120x120mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-2002S-2	4x3W	100x200x100mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-2002S-200	2x3W	100x100x200mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-W19177 Series


Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP54




MK-W19177-140




MK-W19177-185



MK-W19177-220



MK-W19177-300




Product Details Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W19177-140	12W	140x65x90mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W19177-185	18W	185x75x92mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W19177-220	24W	220x85x105mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W19177-300	30W	300x120x110mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-W0637 MK-W0636-2 Series

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

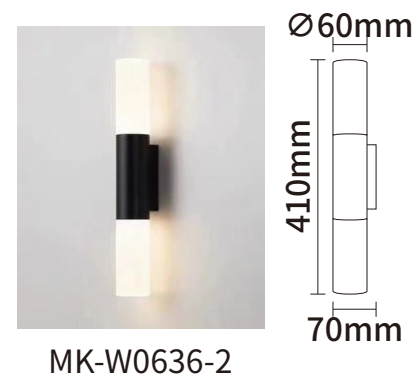


Product Details Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W0637	5W	60x70x278mm	COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W0636-2	2x5W	60x70x410mm	COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-W2449

Material: Die-casting Aluminum
Color Temperature: 3000K/4000K/6500K
Warranty: 2 Years
IP Rating: IP65

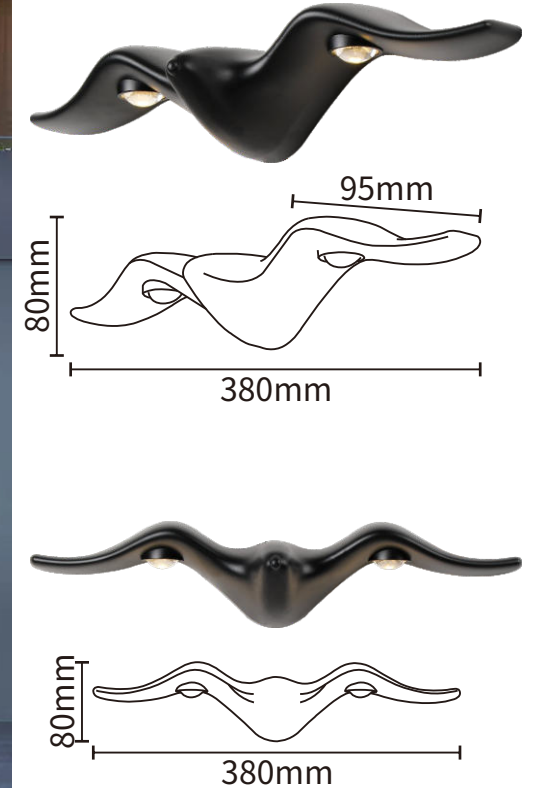

Product Details Parameters:




Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W2449	10W	380x80x95mm	COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-W0640 Series


Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65




MK-W0640-2A



MK-W0640-2B



MK-W0640-2C



Product Detaills Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W0640-2A	2x5W	60x70x138mm	COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W0640-2B	2x5W	60x70x165mm	COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W0640-2C	2x5W	60x70x210mm	COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-W0633 Series


Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65




MK-W0633-2A




MK-W0633-2B



MK-W0633-2C




Product Detaills Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W0633-2A	2x5W	60x70x138mm	COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W0633-2B	2x5W	60x70x165mm	COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W0633-2C	2x5W	60x70x210mm	COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5


MK-496 MK-495

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K/GU10
Warranty: 2 Years
IP Rating:IP65

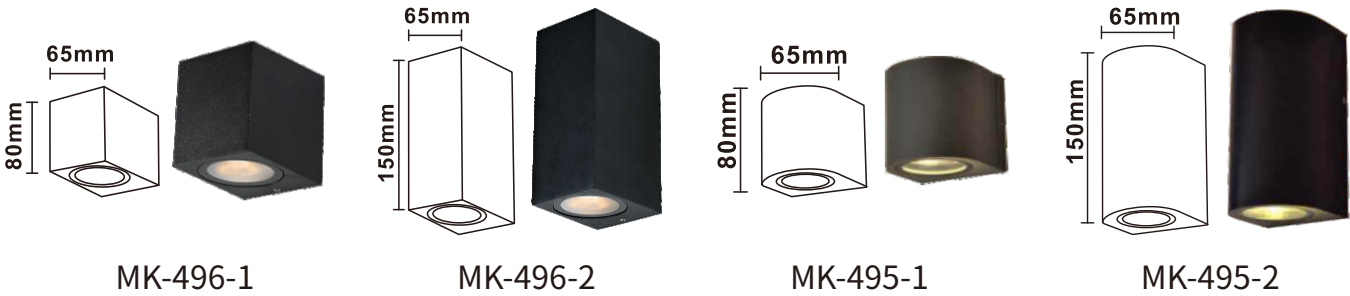

MK-W16497-1

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

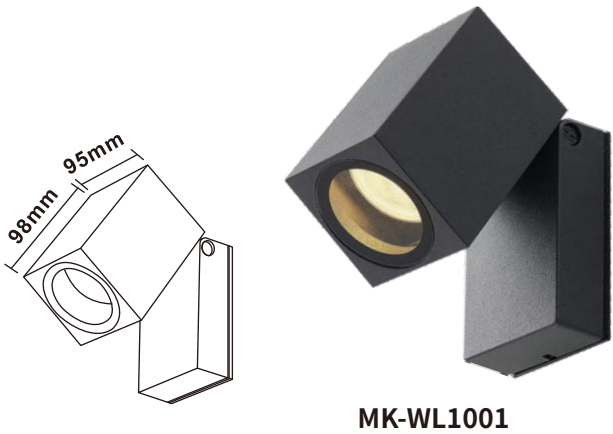


Product Detaills Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-496-1	GU10	65x90x80mm	GU10	AC85-265V 50/60Hz	/	/	/
MK-496-2	GU10	65x90x150mm	GU10	AC85-265V 50/60Hz	/	/	/
MK-495-1	GU10	65x90x80mm	GU10	AC85-265V 50/60Hz	/	/	/
MK-495-2	GU10	65x90x150mm	GU10	AC85-265V 50/60Hz	/	/	/
MK-W16497-1	GU10/7W	98x95x63mm	GU10	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-19292 MK-19293

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K/GU10
Warranty: 2 Years
IP Rating:IP54

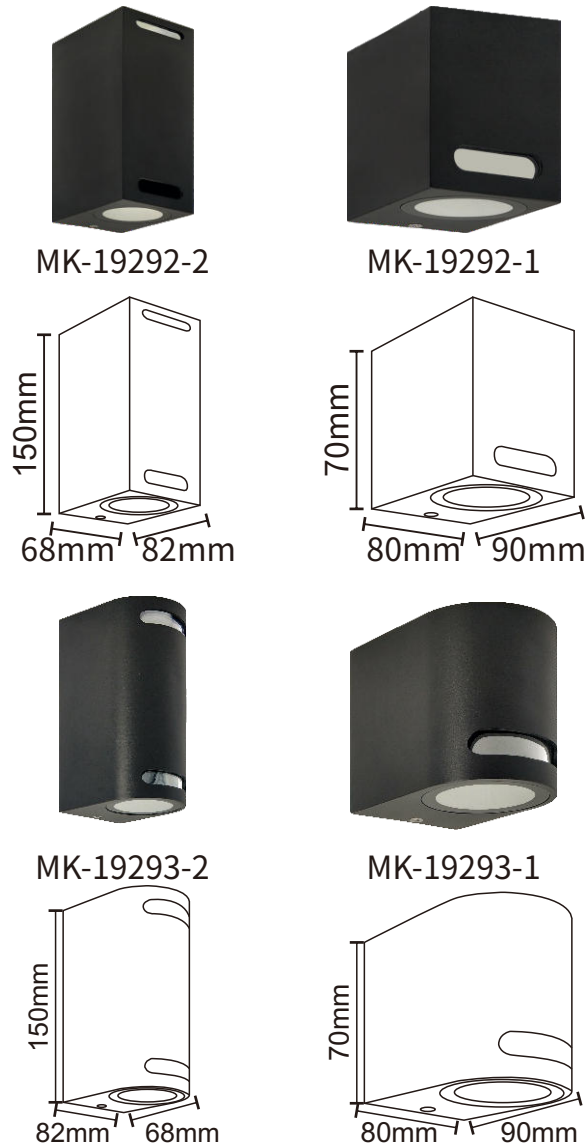


Product Detaills Parameters:




Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-19292-2	2xGU10	68x82x150mm	GU10	AC85-265V 50/60Hz	/	/	/
MK-19292-1	1xGU10	80x90x70mm	GU10	AC85-265V 50/60Hz	/	/	/
MK-19293-2	2xGU10	68x82x150mm	GU10	AC85-265V 50/60Hz	/	/	/
MK-19293-1	1xGU10	80x90x70mm	GU10	AC85-265V 50/60Hz	/	/	/

MK-F810

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

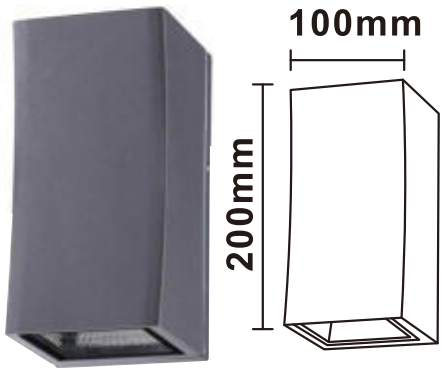

MK-F811-2

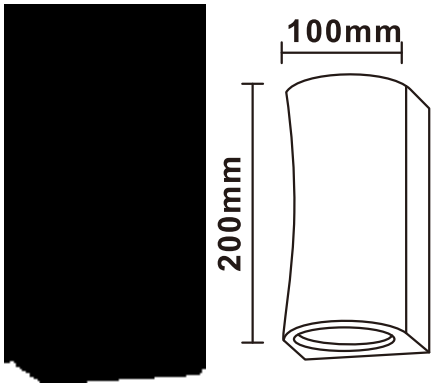

MK-F810-2


Product Detaills Parameters:




Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-F811-2	GU10	200x100x100mm	GU10	AC85-265V 50/60Hz	/	/	/
MK-F810-2	GU10	200x100x100mm	GU10	AC85-265V 50/60Hz	/	/	/

MK-W5117-1 MK-W5118-1

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

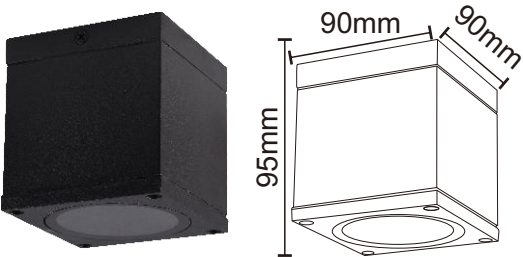

MK-W5117-1

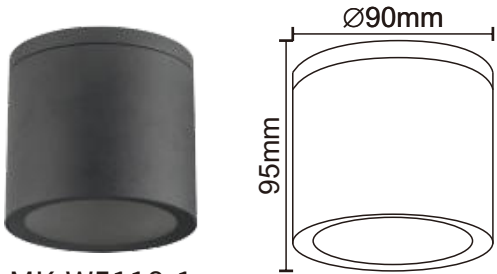

MK-W5118-1


Product Detaills Parameters:




Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W5117-1	GU10	Ø90x95mm	GU10	AC220-240V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W5118-1	GU10	90x90x95mm	GU10	AC220-240V 50/60Hz	≥90LM/W	>80	≥0.5

MK-W2001 Series

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65




MK-W2001-1




MK-W2001-2

MK-W9120C Series

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65



MK-W9120C-1



MK-W9120C-2




Product Detaills Parameters:




Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W2001-1	12W	100x95x112mm	COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W2001-2	24W	190x95x112mm	COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W9120C-1	10W	Ø90x162mm	COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W9120C-2	20W	Ø90x210mm	COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-W1408 Series

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65




MK-W1408-1




MK-W1408-2

MK-W1409 Series

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65



MK-W1409-1



MK-W1409-2


Product Detaills Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W1408-1	5W	60x83x78mm	COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W1408-2	10W	60x83x124mm	COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W1409-1	9W	80x96x110mm	COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W1409-2	2x9W	80x115x190mm	COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5


MK-W19266

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

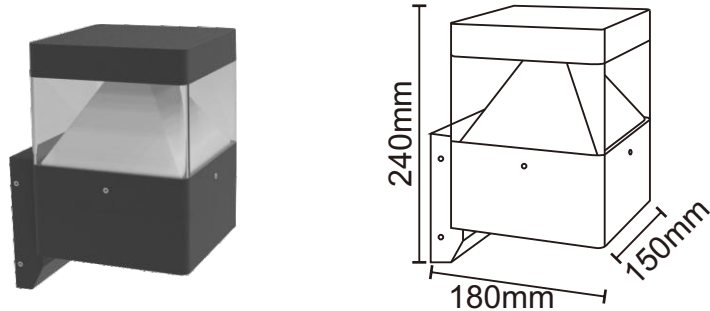

MK-W19214A

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

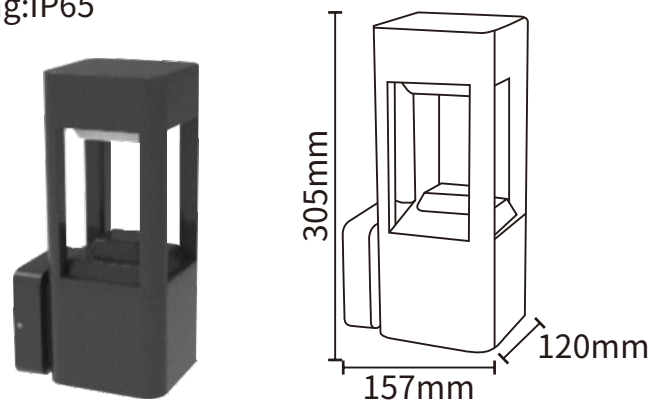


Product Detail Parameters:




Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W19266	20W	150x180x240mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W19214A	12W	120x157x305mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-W19228 MK-W19229

Material:Die-casting Aluminum / Plastic
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

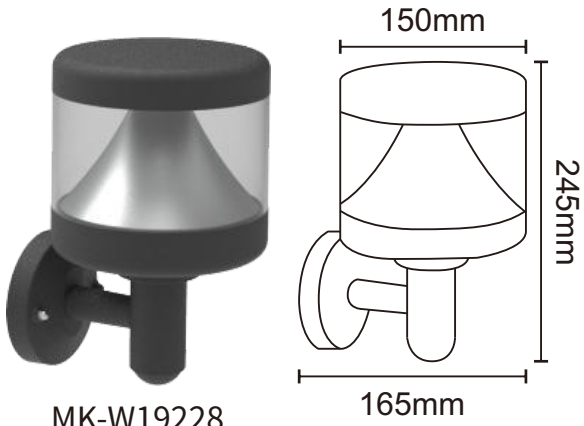

MK-W19228

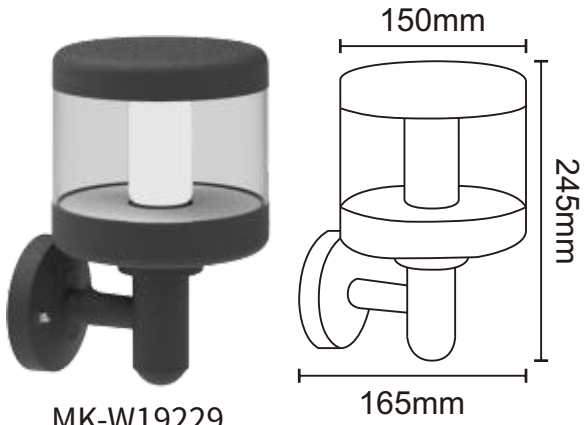

MK-W19229


Product Detail Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W19228	20W	220x45x170mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W19229	E27	220x45x170mm	E27	AC85-265V 50/60Hz	/	/	/


MK-W0816

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

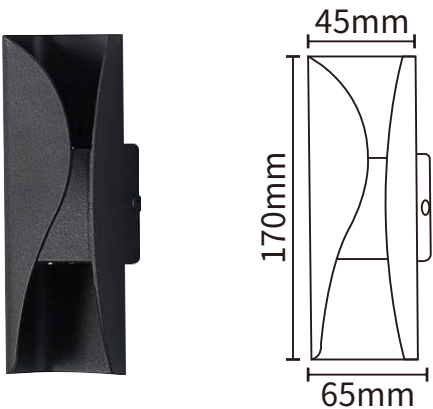


MK-W19306

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

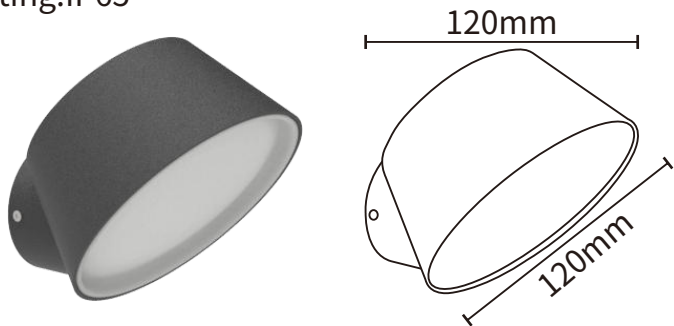


MK-W0815

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

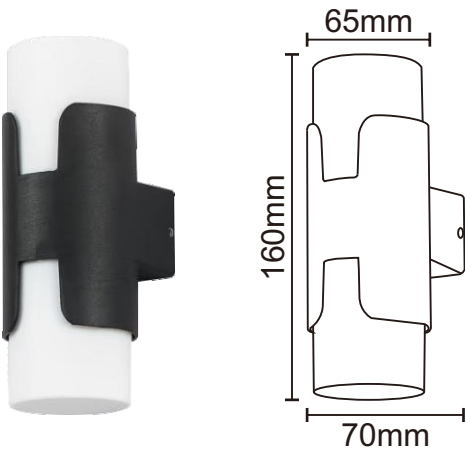

MK-W19231

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

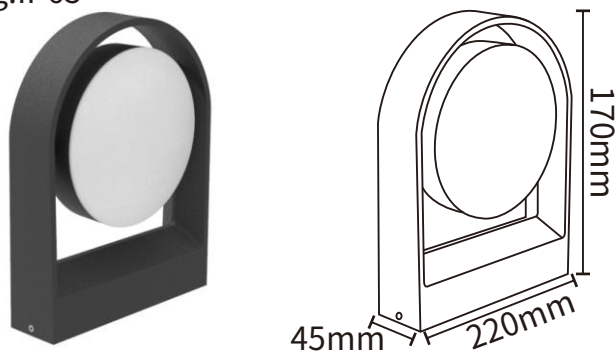

Product Detail Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W0816	12W	45x65x170mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W0815	18W	70x65x160mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5


Product Detail Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W19306	12W	120x120x120mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W19231	18W	170x45x200mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-W19127

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

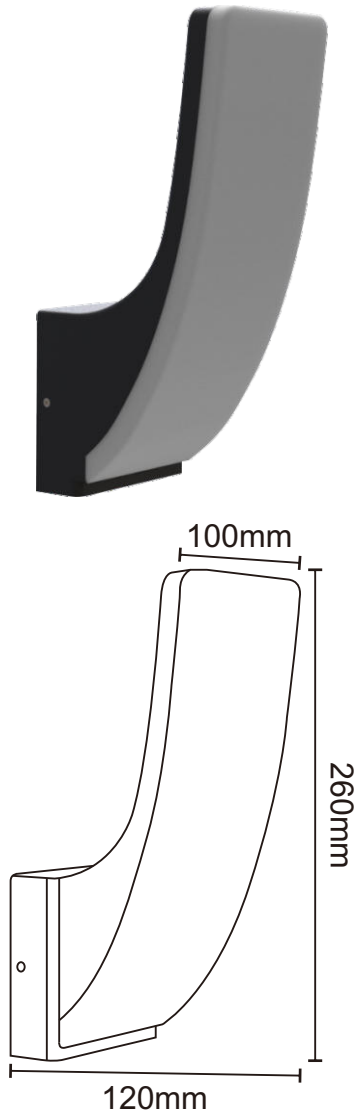


Product Detaills Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W19127	18W	120x100x260mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-W4989

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

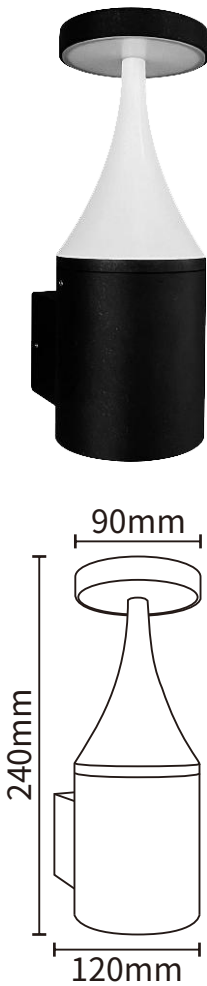

Product Detaills Parameters:




Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W4989	1x5W	120x90x240mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-FC Series


Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65



MK-FC19013

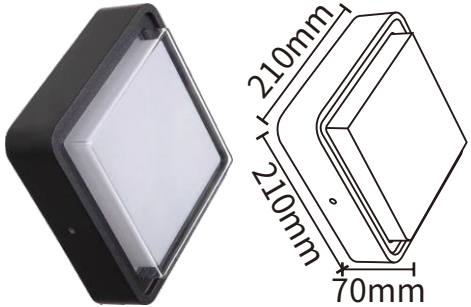

MK-FC19014

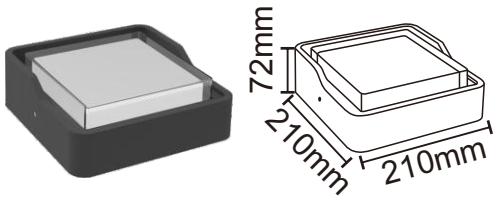

MK-FC19023

Product Detaills Parameters:




Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-FC19013	18W	Ø230x70mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-FC19014	18W	210x210x70mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-FC19023	18W	210x210x72mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-W23222 MK-W23223 Series


Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65




MK-W23222-F




MK-W23223-F



MK-W23222-Y



MK-W23223-Y



Product Detaills Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W23222-F	18W	210x210x86mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W23223-F	18W	210x210x86mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W23222-Y	18W	Ø230x80mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W23223-Y	18W	Ø230x80mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5



Technical drawing of a rectangular block. The drawing shows a perspective view on the left and a top-down view on the right. The dimensions are labeled: 145mm for the width, 245mm for the height, and 100mm for the depth.

Technical drawing of the 'Lampada da parete 1'. The drawing includes a perspective view on the left and a detailed side view on the right. The side view shows the lamp's dimensions: a height of 245mm, a width of 145mm, and a depth of 100mm. The lamp features a dark frame and a translucent glass panel.

Technical drawing of the 3D-printed frame showing dimensions: 145mm width, 245mm height, and 100mm depth.

Model	Wattage	Product size	Material	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W19182	12W	245x145x100mm	Die-casting Aluminum	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W19183	12W	245x145x100mm	Die-casting Aluminum	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W19184	12W	245x145x100mm	Die-casting Aluminum	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W19185	12W	245x145x100mm	Die-casting Aluminum	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5


Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

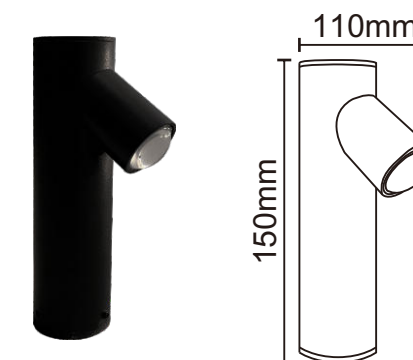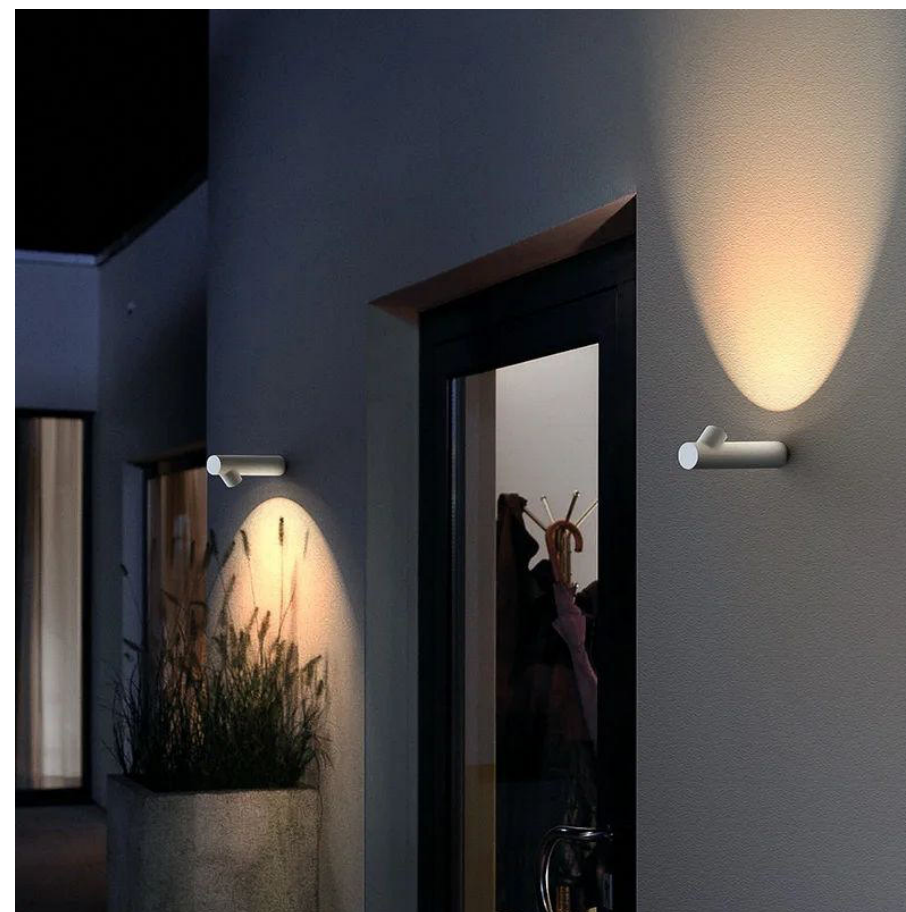


Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W6001-1	1x5W	110x150mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W6001-3	3x5W	110x150mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-W2470 Series

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

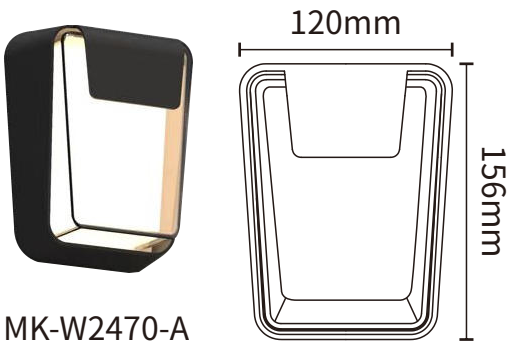


MK-W2470-A

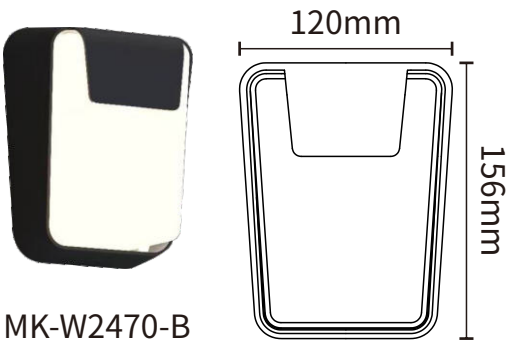

MK-W2470-B

MK-W2471

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

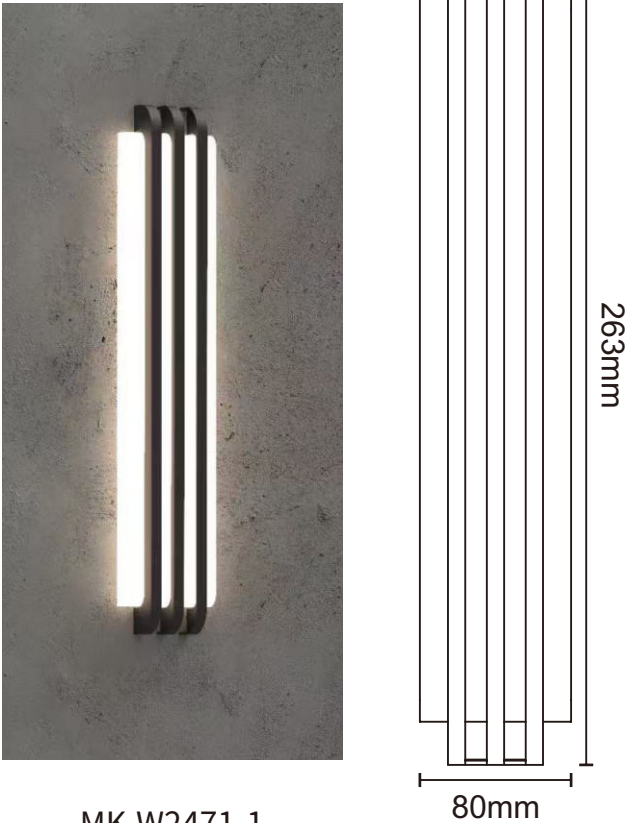

MK-W2471-1


Product Detail Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W2470-A	12W	156x120x80mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W2470-B	12W	156x120x80mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W2471	18W	263x59x80mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5



MK-W2472

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

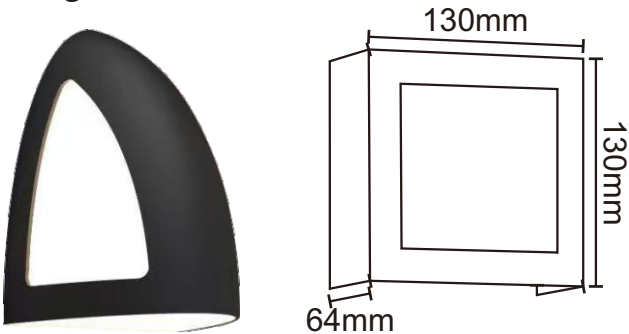

MK-W2473 MK-W2496

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

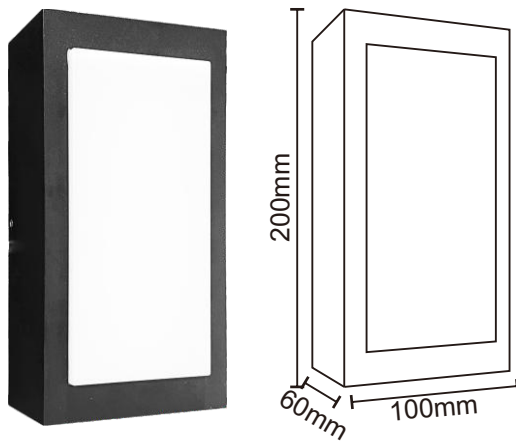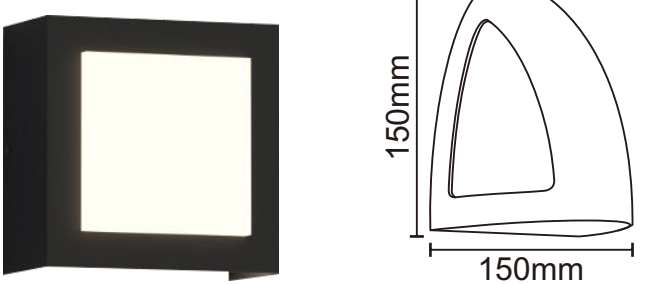


Product Detail Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W2472	12W	150x120x150mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W2473	2x3w+5W	130x130x64mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W2496	2x3w+10W	200x100x60mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5


MK-W2474

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

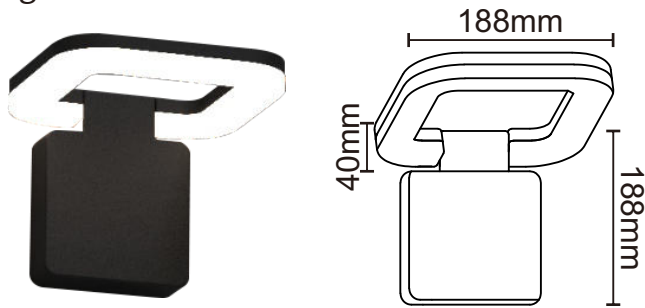


MK-W2477

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

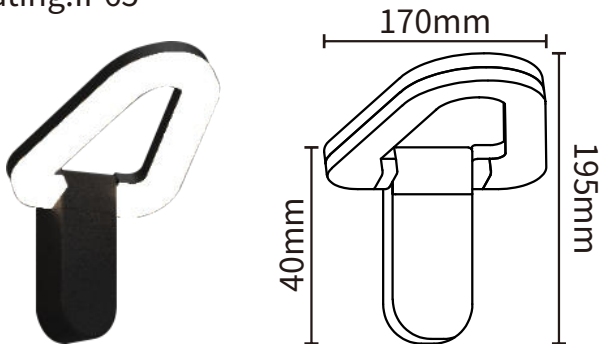


MK-W2475 MK-W2476 Series

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

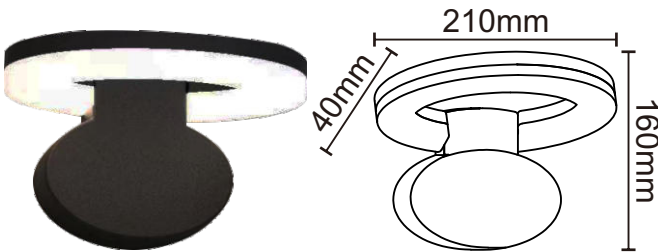

MK-W2475

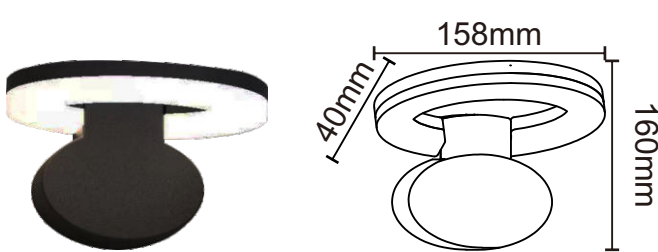

MK-W2476



Product Detaills Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W2474	18W	188x188x40mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W2475	18W	210x40mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W2476	12W	158x40mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-W2478

Material:Die-casting Aluminum + Glass
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

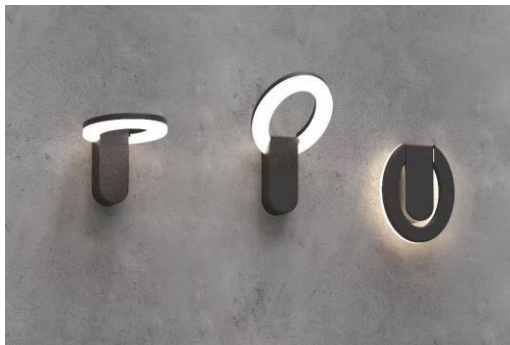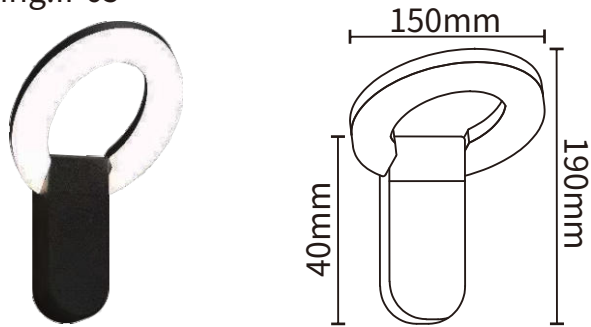


Product Detaills Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W2477	12W	195x170x40mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W2478	12W	190x150x40mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5


MK-W2479

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

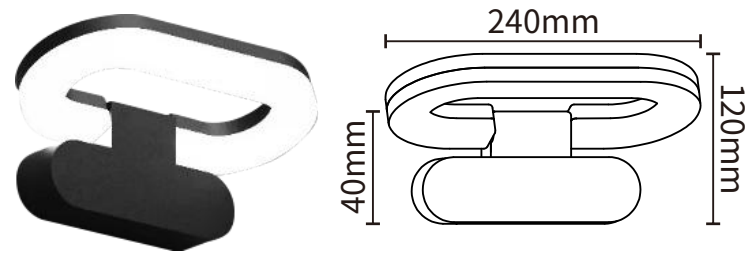


MK-W2480

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

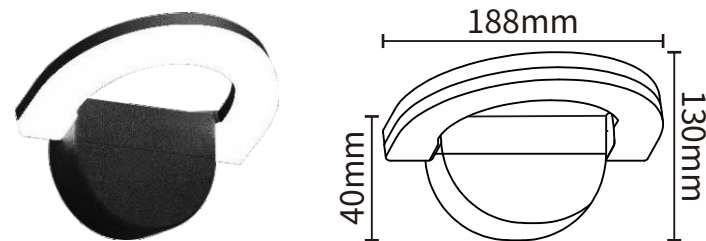


Product Details Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W2479	18W	240x120x40mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W2480	12W	188x130x40mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5


MK-W2481

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65 131mm

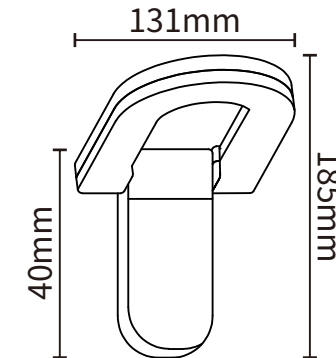

MK-W2485

Material: Die-casting Aluminum
Color Temperature: 3000K/4000K/6500K
Warranty: 2 Years
IP Rating: IP65




Product Details Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W2481	12W	185x131x40mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W2485	2x9W	160x200mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-W2482 MK-W2483

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

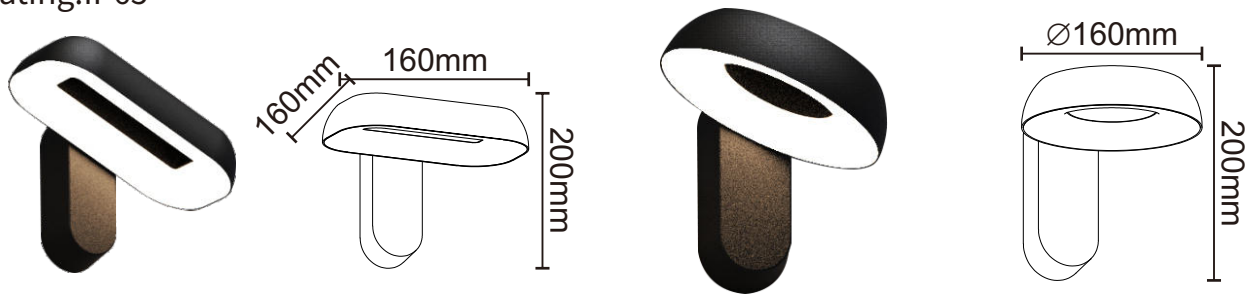


MK-W2482

MK-W2483

MK-W2484 MK-W2486

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

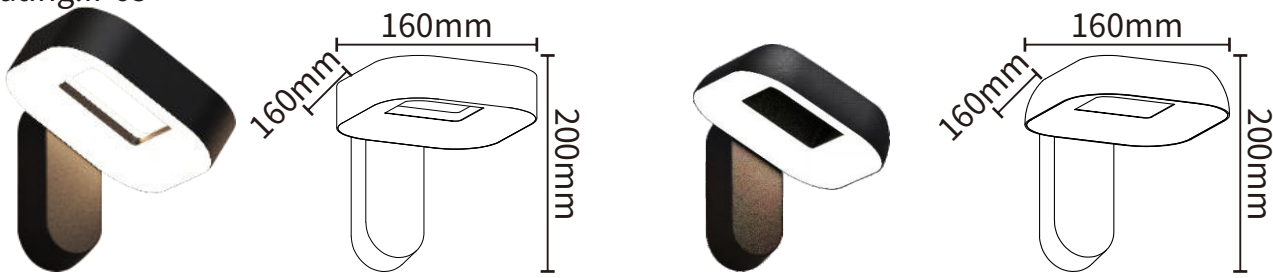

MK-W2484

MK-W2486

Product Detaills Parameters:




Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W2482	18W	160x160x200mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W2483	12W	Ø160x200mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W2484	2x9W	160x160x200mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W2486	12W	160x160x200mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-W19259 Series

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65



MK-W19259 MK-W19259-感应
(可装美规挂板)

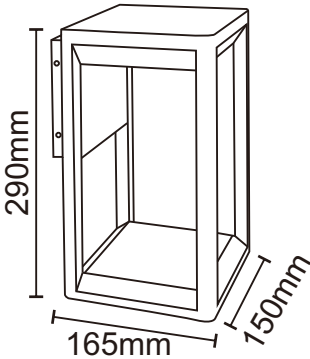




Product Detaills Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W19259	12W	150x150x290mm	COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W19259-感应	12W	150x150x290mm	COB	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-W23226Y Series

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

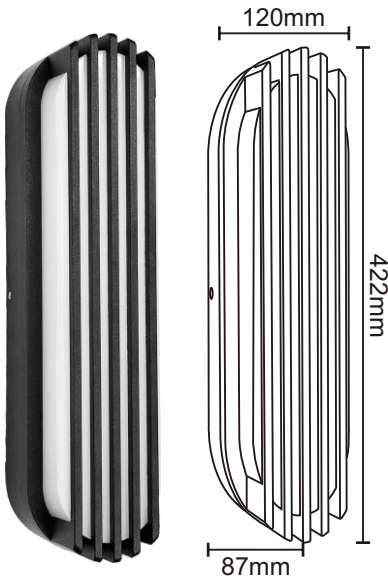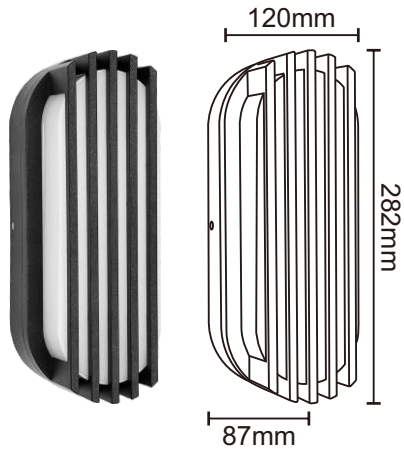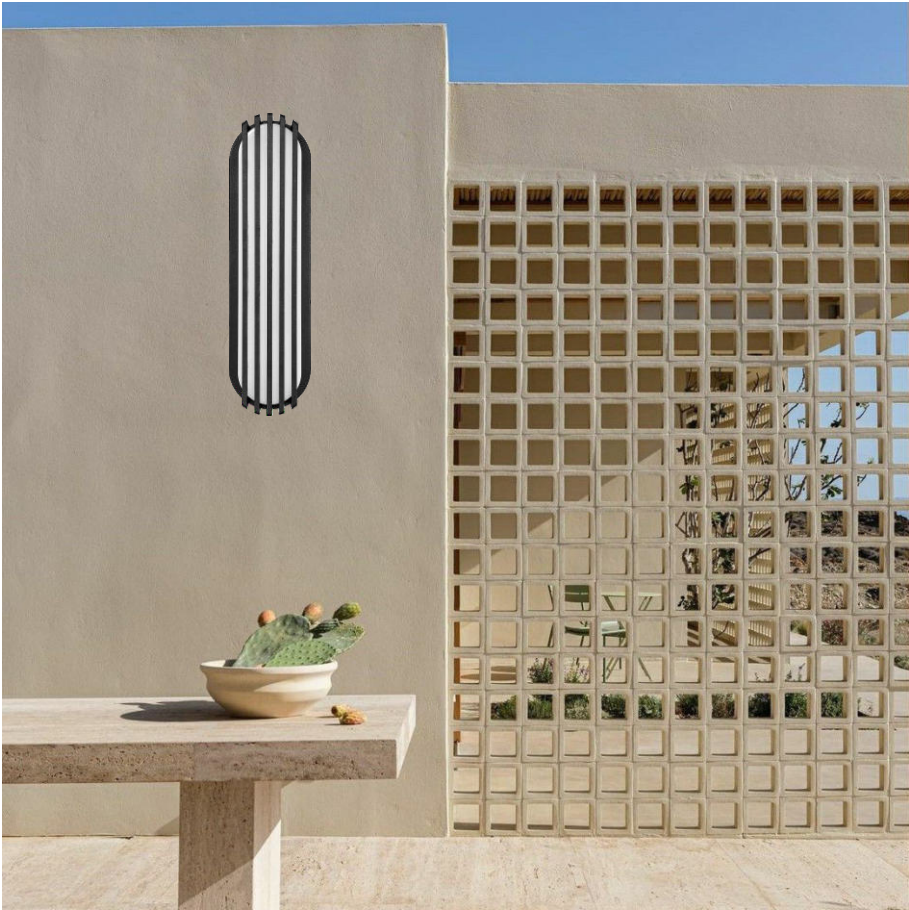



Product Detaills Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W23226Y-1	10W	120x87x282mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W23226Y-2	30W	120x87x422mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5

MK-W23227F Series

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

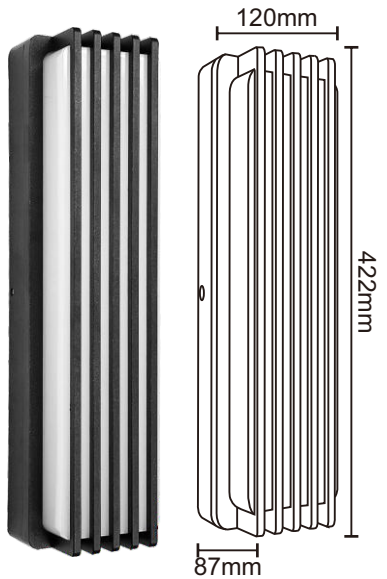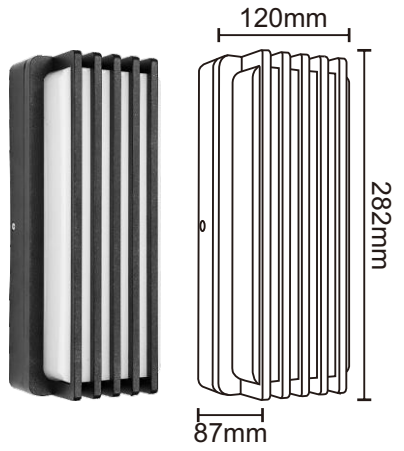



Product Detaills Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W23227F-1	10W	120x87x282mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W23227F-2	30W	120x87x422mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5


MK-W19020 MK-W19246

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65

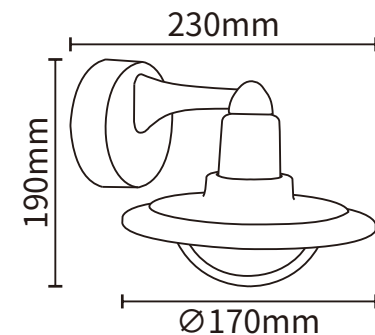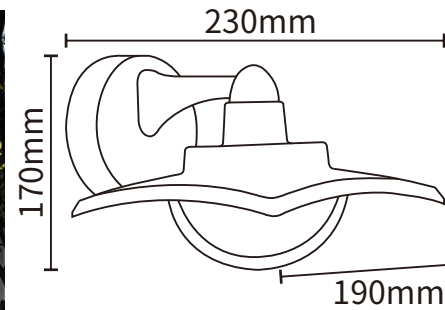


Product Details Parameters:

Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W19020	6W	190x170x230mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5
MK-W19246	6W	Ø170x230mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5



MK-W19183A

Material: Die-casting Aluminum
Color Temperature: 3000K/4000K/6500K
Warranty: 2 Years
IP Rating: IP65

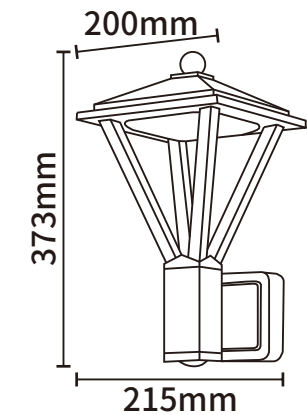


Product Details Parameters:

Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W19183A	12W	215x200x373mm	SMD	AC85-265V 50/60Hz	≥90LM/W	>80	≥0.5





Product Details Parameters:



Model	Wattage	Product size	Light source	Input voltage	Material	Color
MK-W5101-1	E27 MAX 11W	140x80x160mm	E27	AC220-240V 50/60Hz	Aluminum + PC	Black
MK-W5101-2	E27 MAX 2x11W	140x80x240mm	E27	AC220-240V 50/60Hz	Aluminum + PC	Black
MK-W5102	E27 MAX 11W	80x80x280mm	E27	AC220-240V 50/60Hz	Aluminum + PC	Black
MK-W5103-1	E27 MAX 11W	140x80x160mm	E27	AC220-240V 50/60Hz	Aluminum + PC	Black
MK-W5103-2	E27 MAX 2x11W	140x80x240mm	E27	AC220-240V 50/60Hz	Aluminum + PC	Black
MK-W5104	E27 MAX 11W	80x80x280mm	E27	AC220-240V 50/60Hz	Aluminum + PC	Black

MK-W5106

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65



Product Detaills Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W5106-1	E27	130x80x200mm	E27	AC85-265V 50/60Hz	/	/	/
MK-W5106-2	2xE27	130x80x430mm	E27	AC85-265V 50/60Hz	/	/	/

MK-W5119 Series

Material:Die-casting Aluminum
Color Temperature:3000K/4000K/6500K
Warranty: 2 Years
IP Rating:IP65



Product Detaills Parameters:



Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W5119-1	E27	235x190x270mm	E27	AC85-265V 50/60Hz	/	/	/
MK-W5119-2	E27	190x190x320mm	E27	AC85-265V 50/60Hz	/	/	/






MK-W5107



MK-W5109




MK-W5110

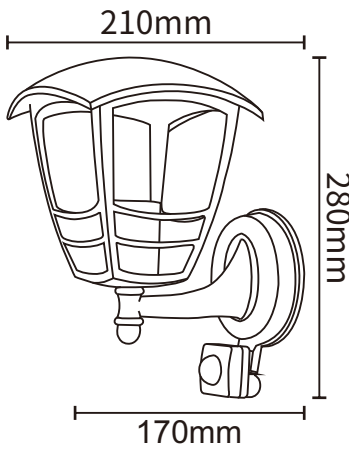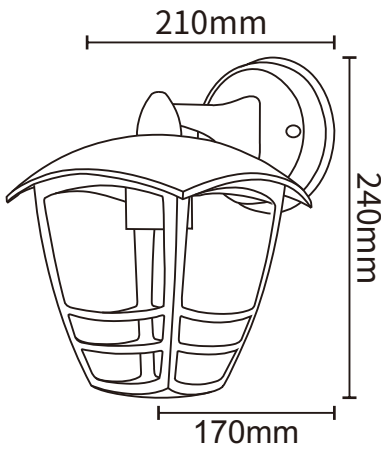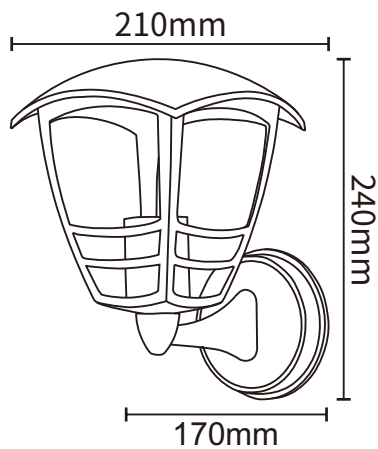


Product Details Parameters:




Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W5107	E27	210x170x240mm	E27	AC220-265V 50/60Hz	/	/	/
MK-W5109	E27	210x170x240mm	E27	AC220-265V 50/60Hz	/	/	/
MK-W5110	E27	210x170x280mm	E27	AC220-265V 50/60Hz	/	/	/

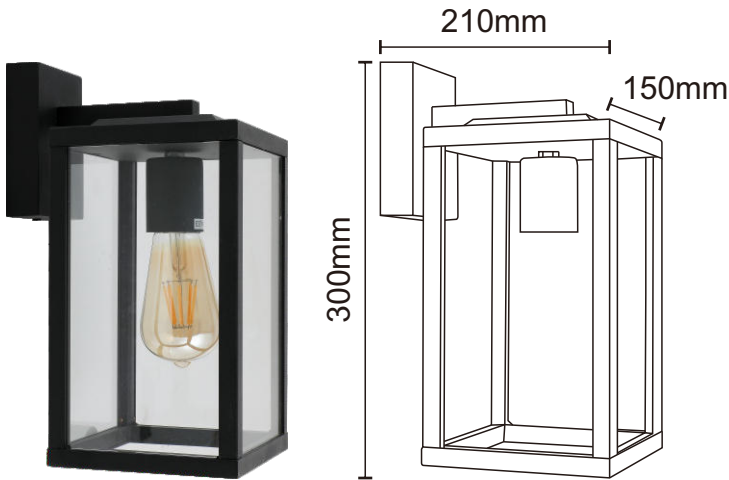


MK-W5111

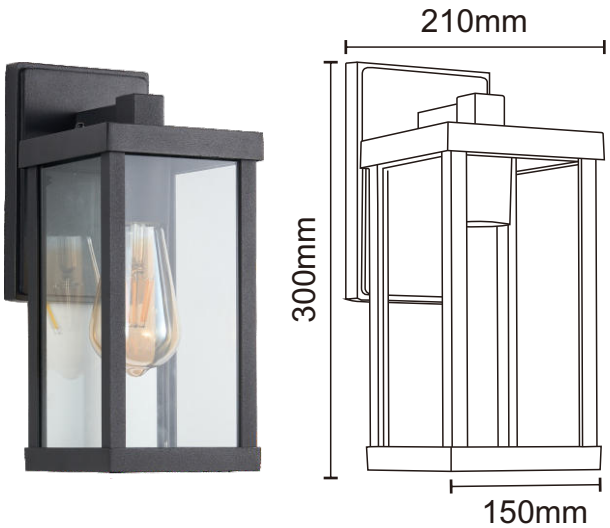

MK-W5112

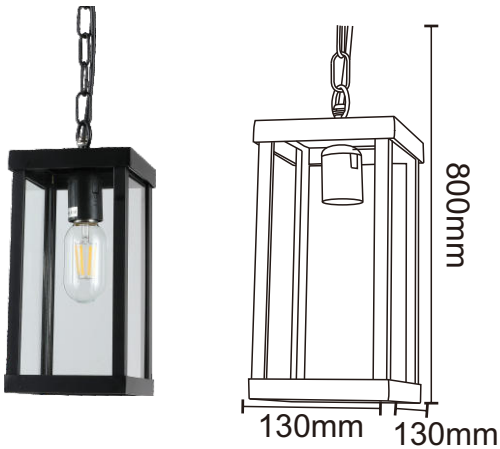

MK-W5113

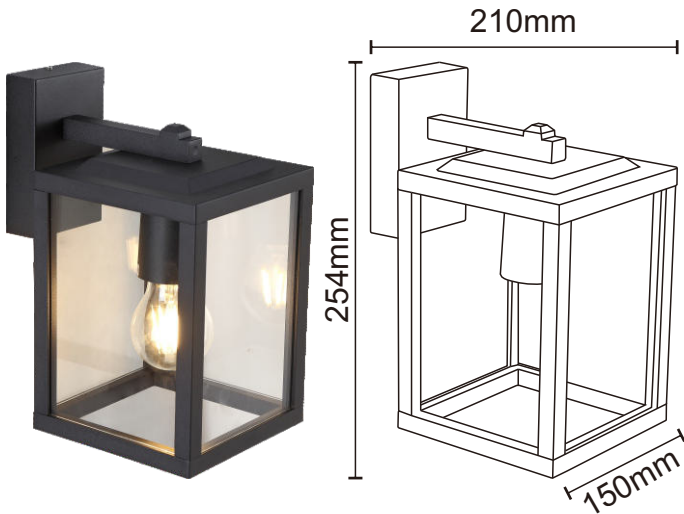

MK-W5114

Product Details Parameters:





Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W5111	E27	210x150x300mm	E27	AC85-265V 50/60Hz	/	/	/
MK-W5112	E27	160x130x320mm	E27	AC85-265V 50/60Hz	/	/	/
MK-W5113	E27	130x130x800mm	E27	AC85-265V 50/60Hz	/	/	/
MK-W5114	E27	210x150x254mm	E27	AC85-265V 50/60Hz	/	/	/

Material:Die-casting Aluminum+Glass
Warranty: 2 Years
IP Rating:IP65

Material:Die-casting Aluminum+Glass

Warranty: 2 Years

IP Rating:IP65

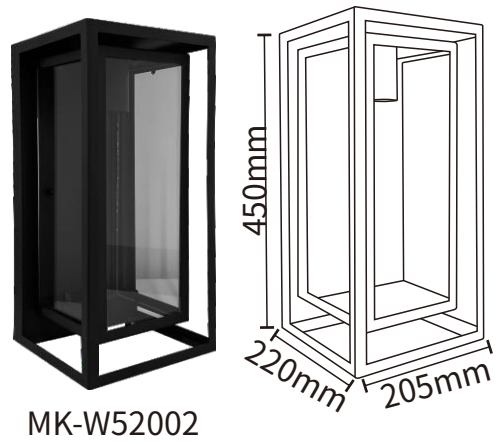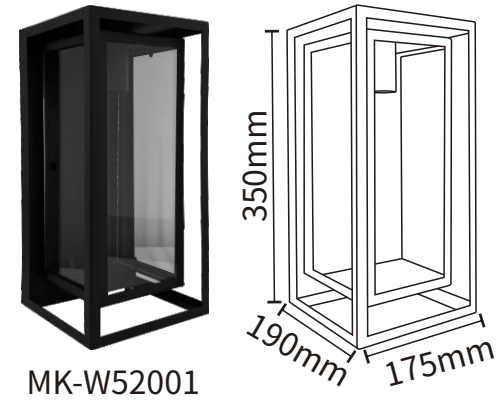

Model	Wattage	Product size	Light source	Input voltage	Light effect	CRI(Ra)	Power factor
MK-W52001	1xE27	190x175x350mm	E27	AC85-265V 50/60Hz	/	/	/
MK-W52002	1xE27	220x205x450mm	E27	AC85-265V 50/60Hz	/	/	/

